

Practice Workbook

This workbook is designed for use in Live instructor-led training and for OnDemand self study. OnDemand videos for this course are available through [CONNECT Advisor](#) and on the [LEARNserver](#).

Introduction to OpenSite Designer

*This course is suitable for the **2019 Release 1 (10.07.00.56)** version of:*
OpenSite Designer CONNECT Edition

About this Practice Workbook...

- This PDF file includes bookmarks providing an overview of the document. Click on the bookmark to quickly jump to any section in the file.
- Both Imperial and Metric files are included in the dataset. Throughout this practice workbook Imperial values are specified first and the metric values second with the metric values enclosed in square brackets. For example: **12'** [\[3.4m\]](#)
- This course workbook uses the [Training and Examples](#) workspace delivered with the software.
- The terms [Left-click](#), [Click](#), [Select](#) and [Data](#) are used interchangeably to represent pressing the left mouse button. The terms [Right-click](#) and [Reset](#) are also used interchangeably to represent pressing the right mouse button. If your mouse buttons are assigned differently, such as for left-handed use, you will need to adjust accordingly.

Have a Question? Need Help?

If you have questions while taking this course, search in [CONNECT Advisor](#) for related courses and topics. You can also submit questions to the Civil Design Forum on Bentley Communities where peers and Bentley subject matter experts are available to help.

OpenSite Designer Overview

OpenSite Designer is a new application that employs an open modeling environment for the project delivery of site design projects from concept to completion. The application provides complete detailed design capabilities for rapid site modeling and analysis, earthwork optimization and quantification, drainage and underground utility design, automated project deliverables, and more.

OpenSite Designer provides the most comprehensive site design workflow available including reality modeling, geotechnical, underground utilities, stormwater drainage, terrain modeling, detailed drawing production, and visualization.

Using OpenSite Designer you can:

- Assemble context data rapidly from a variety of sources, such as point clouds, 3D reality meshes, terrain data, images, and geospatial information to bring real-world settings to your project.
- Achieve exponential modeling performance gains with the model-centric production of design deliverables.
- Enable users to share project information across teams, locations, and disciplines with precision and security.
- Use Catalog Services to manage and deliver functional components for consistent generative design across the engineering team.
- Access Documentation Center to produce multi-discipline documentation for all work on assets across the project.
- Share realistic visualizations with the public and stakeholders to gather feedback, improve public engagements, and speed project approvals.

Key Capabilities

- Optimize Site Layout

Simplify site layouts with designer-defined parametric drawing capabilities.

- Optimize Earthwork

Employ a highly advanced optimization engine for earthwork allowing designers to quickly and easily explore alternatives. The grading solver runs thousands of iterations based on designer-defined constraints for each site layout to find the best cost of construction.

- Perform Design-Time Analysis


Ensure visibility into overall project performance with design-time analytics to achieve optimized design outcomes for a wide variety of analysis such as drainage, terrain, safety, grading, site visibility, and more.

Course Overview

This workbook is designed to help users understand the basic tools within OpenSite Designer. Users will learn workflows for creating a site project and also learn about using the automation and optimization tools for grading.

The complete site design is shown below. We will begin with the conceptual horizontal layout of the site by creating the project site limits, the building footprint, parking lots, main drive and connector drives.

Once the conceptual horizontal layout is complete we will run the Grading Solver which will optimize the grading for the site and also define the elevations of the 3D site elements.

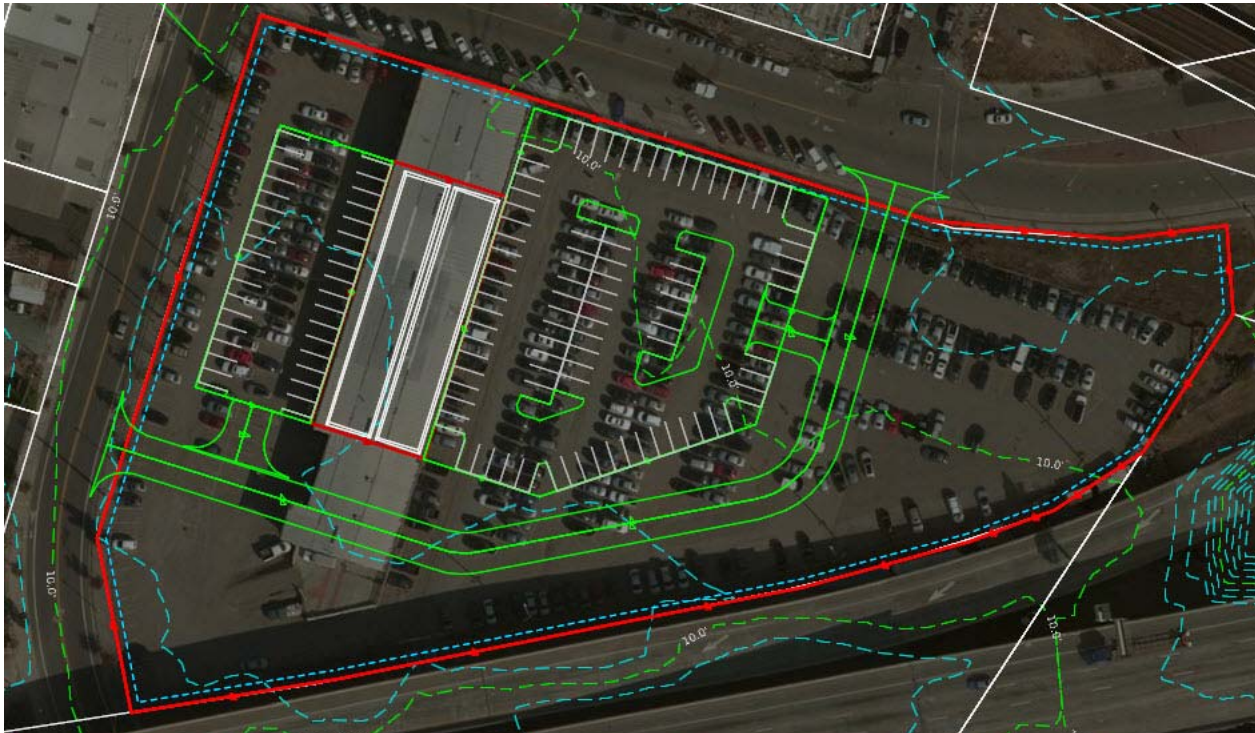

OpenSite Designer Workflow

The typical OpenSite Designer workflow is listed below.

1. Import or Attach an existing terrain model and property data as reference files to the design file.
2. Create 2D horizontal layout of the proposed site using specially designed site layout tools.
3. Run the Grading Solver to perform grading optimization of the site.
 - The Grading Solver is a very powerful and useful tool that will analyze the horizontal layout against the existing terrain and determine the optimized grading. The Grading Solver also automatically creates the vertical geometry and 3D features of the site design.
4. Review and analyze the grading, contours and 3D model.
5. Revise site features as needed.
6. Change Phase to Final.

A fundamental concept for new users to understand is that OpenSite Designer stores all of the site design elements in the design file. As you place elements rules and associations are being created based on the default site design values that are set in the *Site Layout Settings*.

Also, OpenSite Designer is designed to work with reference files. For example, the surveyor may deliver the existing ground terrain in a separate **.dgn** file and the architect may deliver the building footprint in a separate **.dgn** or **.dwg**. These files can be easily referenced into your design file to use as a starting point for your site design.

Exercise 1: Getting Started

In this exercise, you will learn to start the software, select the proper WorkSpace & WorkSet, open a design file, review the interface, review design file settings, define a geographical coordinate system, import existing ground data, attach reference files, set the active terrain model and define 2D & 3D Model Views.

Skills Taught

- Start the Software
- Select WorkSpace and WorkSet
- Create a Design File (.dgn)
- Review the Ribbon Interface
- Review Design File Settings
- Define Geographical Coordinate System
- Import Existing Ground LandXML file.
- Attach Existing Terrain and GIS Parcels Reference Files
- Set Active Terrain Model
- 2D and 3D Model Views


Start the Software and Create a Design File

In this section you will start the software, set the WorkSpace & WorkSet and create a design file.

1. Start the software.
2. Set the WorkSpace and WorkSet

The WorkSpace and WorkSet define standards that are used by the software. The Workspace defines the agency/company wide standards and the WorkSet is used to define project specific standards. The WorkSpace and WorkSet used for this training are installed during the software installation.

- a. Select **Training and Examples** from the *WorkSpace* drop-down menu.
- b. Select **Training-Imperial** [*Training-Metric*] from the *WorkSet* drop-down menu.

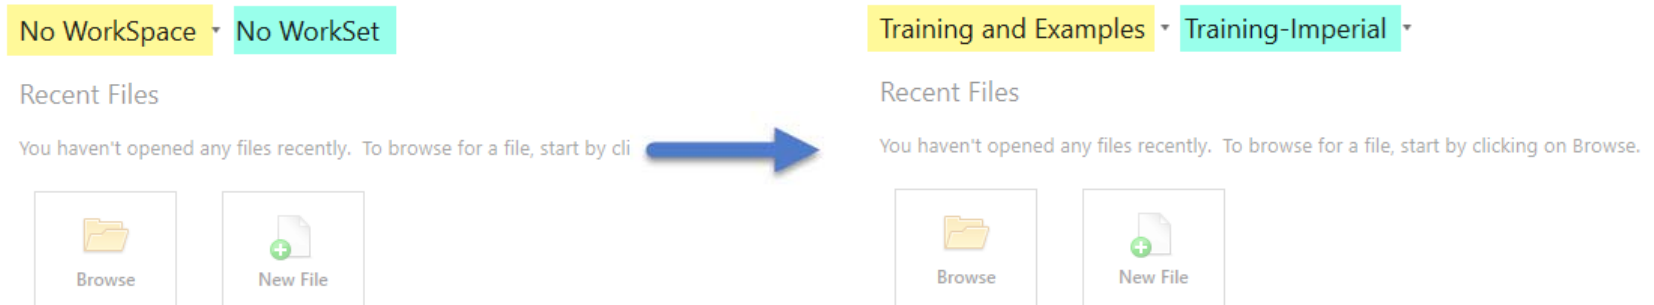

3. Create a new 3D design file.





- a. Select **New File**.
- b. Browse to *C:\Bentley Training\Introduction to OpenSite Designer* or other folder where you unzipped the dataset files.
- c. Set the *Seed* to *C:\ProgramData\Bentley\OpenSite Designer CE\Configuration\Organization-Civil_Civil Default Standards - Imperial\Seed\Seed3D - Imperial Design.dgn* [*Metric-Seed3D - Imperial Design.dgn*].
 - The seed file is used as a template to set design file settings such as the Drawing Units, Levels, etc.
- d. Create a new file named **Terrain_Existing.dgn** [*Metric-Terrain_Existing.dgn*].
- e. Click **Save**. The file will now be created and will open.


Navigating the Interface

Tools can be accessed a variety of ways, including the familiar Ribbon interface. Ribbons are arranged by Workflows, which are selected from a pull-down in the upper left corner of the software. In this section, we will take a look at the interface.

1. Activate the **OpenSite Modeling** workflow from the pick list in the upper left corner if it is not already active.

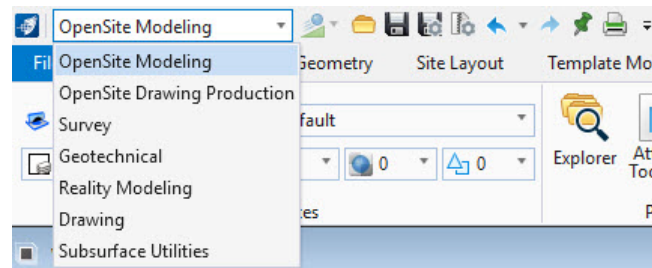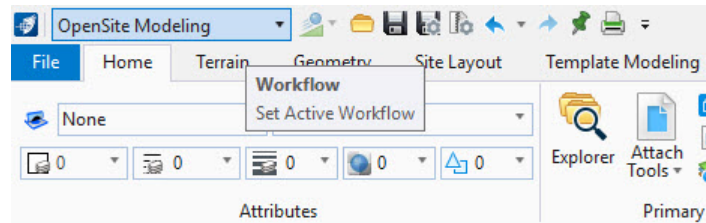


The ribbon menu will reflect the **OpenSite Modeling** tools. The tools are organized into categories on the *ribbon tabs*.

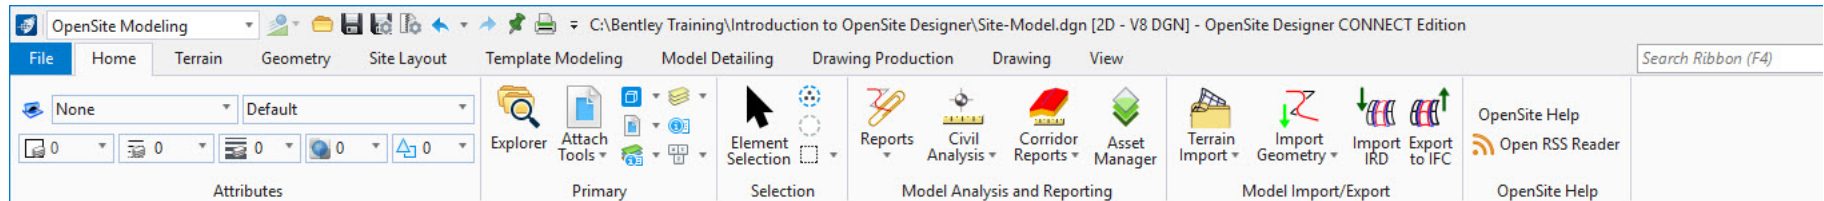

- **Home** - Common tools such as Attributes, Explorer, Attach Reference Tools, Models, Level Display and Element Selection.
 - Note the OpenSite Help tool in the upper right corner of the ribbon. (*Home > OpenSite Help > OpenSite Help*)
- **Terrain** - Element selection and terrain modeling tools.
- **Geometry** - Element selection, Civil AccuDraw and geometry tools including Lines, Arcs, and Points.
- **Site Layout** - Element selection and specialized groups of tools for site layout and design (Draw Basic, File Import, Parking, Pad, Pathway, Vertical Geometry, Grading Proposed and Modify Phase).
- **Template Modeling** - Element selection, superelevation and corridor modeling tools.
- **Model Detailing** - Element selection, Civil Cells and 3D tools (Linear Templates, Surface Templates, etc.)
- **Drawing Production** - Element selection, saved views, notes, text, annotations, and plans production (cross section, plan, and profile) tools.
- **Drawing** - Commonly used MicroStation drawing tools. To the complete set of MicroStation tools change the active workflow to Drawing, Modeling (3D only) or Visualization (3D only).
- **View** - Commonly used view control tools.

2. **Click** on each of the *Ribbon tabs* and notice how each tab has a different set of tools.

The **Quick Access Toolbar** to the right of the *Workflow* drop down list contains common tools like Create New File, Open File, Save Settings Compress File, Undo, Redo, Print, Explorer and Properties. It is easily customizable.





A **Search Ribbon** tool is also available at the right side of the title bar. Use it to find tools across the multiple ribbons. When you are not sure where to find a tool, simply type the command in the *Search Ribbon* field and a search will be performed across all ribbon menus.

Shown to the right are results for a search for Parking.

3. Search for a tool using the search ribbon. Key in **Parking** in the *Search Ribbon* field.



4. Notice the results of the ribbon search are displayed in a dialog below the *Search Ribbon* field.
5. Click on *Show Details* in the bottom right corner of the dialog, the tool list will be expanded and the description of the tools are now shown.

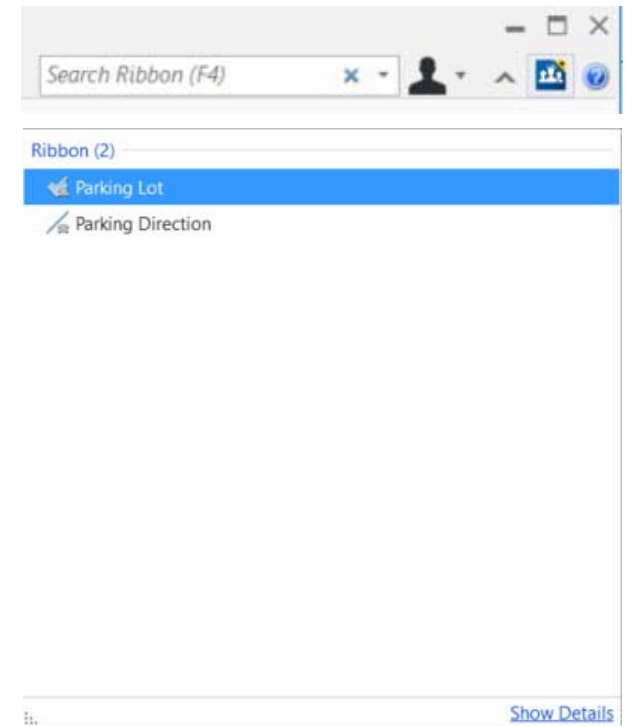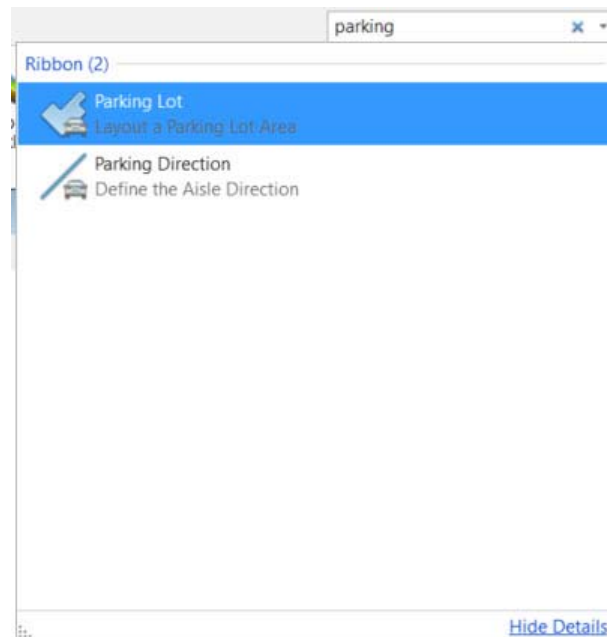


6. **Hover** over **Parking Lot**

The search results expand, showing where the **Parking Lot** tool is located in the ribbons: **OpenSite Modeling -> Site Layout -> Parking**. You may have different or additional paths.

Clicking on the **OpenSite Modeling -> Site Layout -> Parking** path will open the tool.

7. In the Search Results dialog, **Left-click** *Parking Lot* to open the *Place Parking* tool.

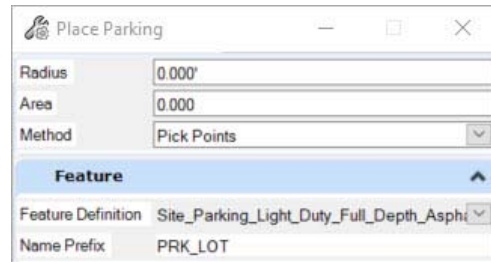

8. **Right-click** to close the toolbox.




9. Introduction to the *Back Stage View*.

- a. Activate the *Back Stage View* by clicking **File** in the ribbon menu.


The *Back Stage View* will appear.

Notice the various options on this screen such *New*, *Open*, *Save*, *Save Settings*, *Settings*, *Help*, etc. Some of these “File” tools are available from the Quick Access Toolbar, but the bulk of the File capabilities are here.

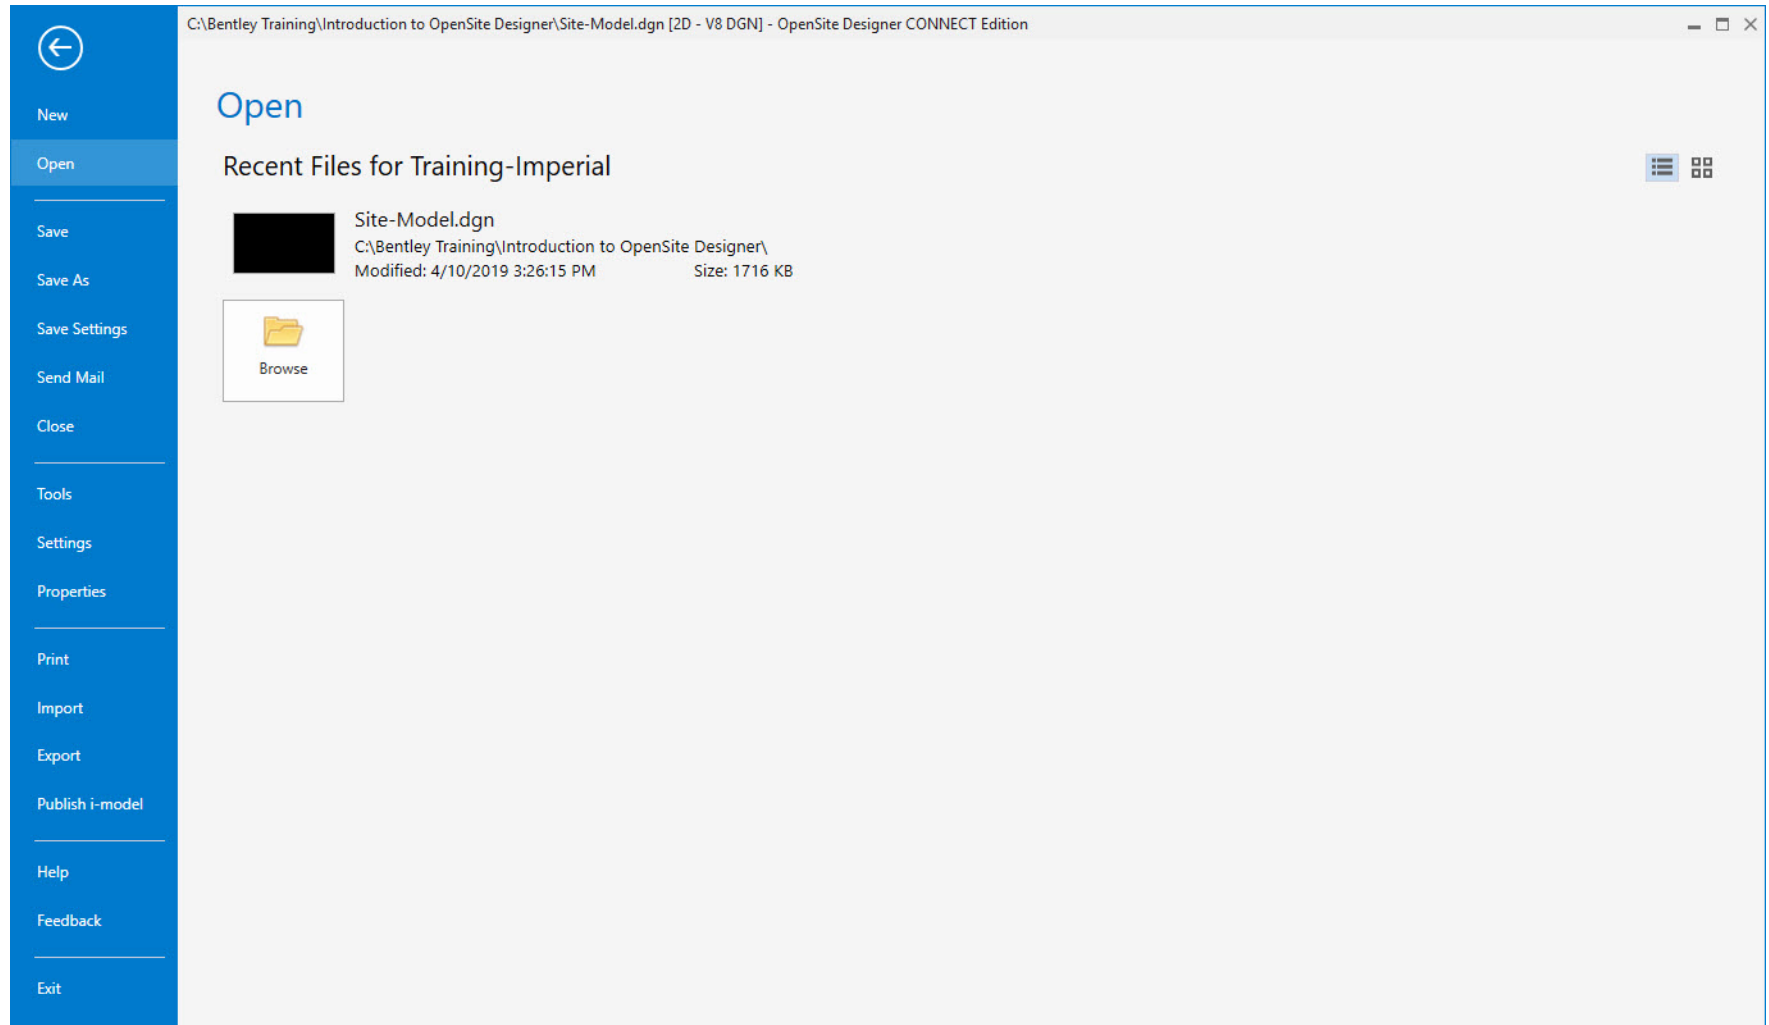

b. Select **Settings**.

Settings are broken up logically. *User*, *System*, *File* and *Configuration* all have corresponding tools here. This keeps the ribbon menus focused on the engineering and production tools.

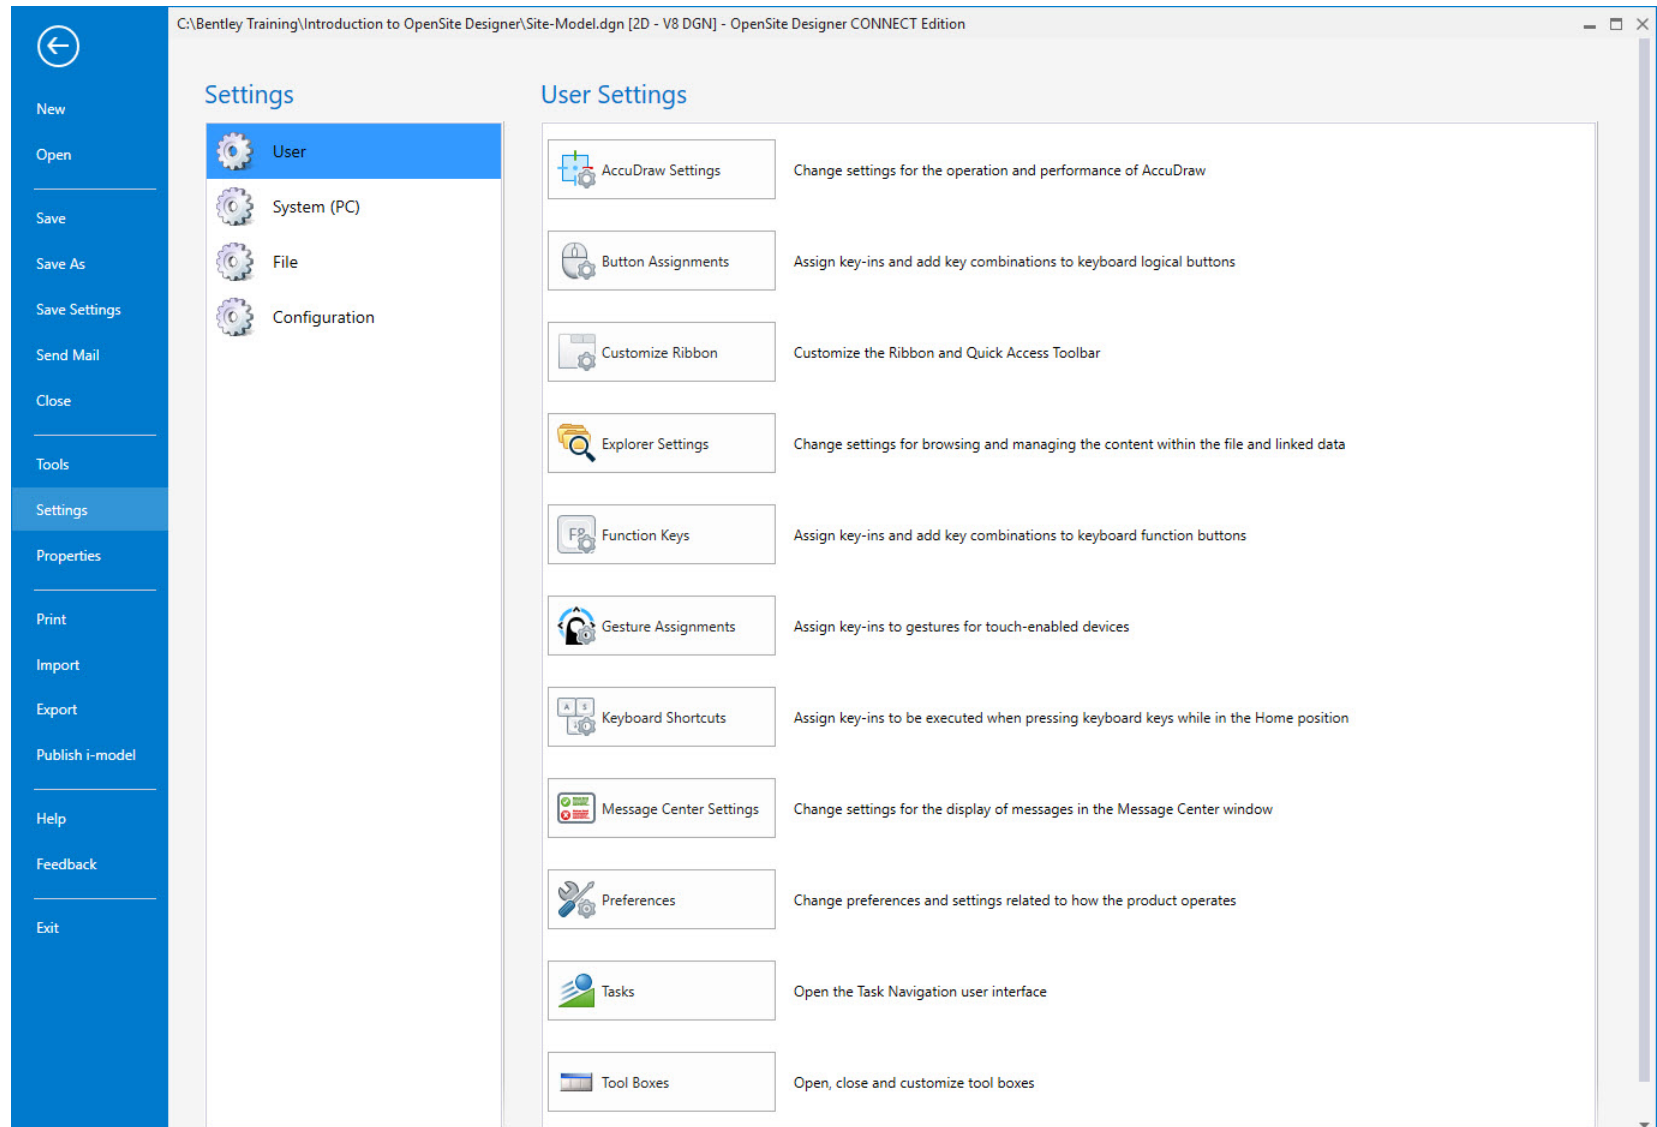


Reviewing the Working Units and Civil Formatting

After creating a new file it is a best practice to review the **Working Units**, **Civil Formatting** and **Geographic Coordinate System** are defined correctly. In this section, you will learn how to review the working units and civil formatting.


1. Review the **Working Units**.

a. Navigate to **Settings > File > Design File Settings**

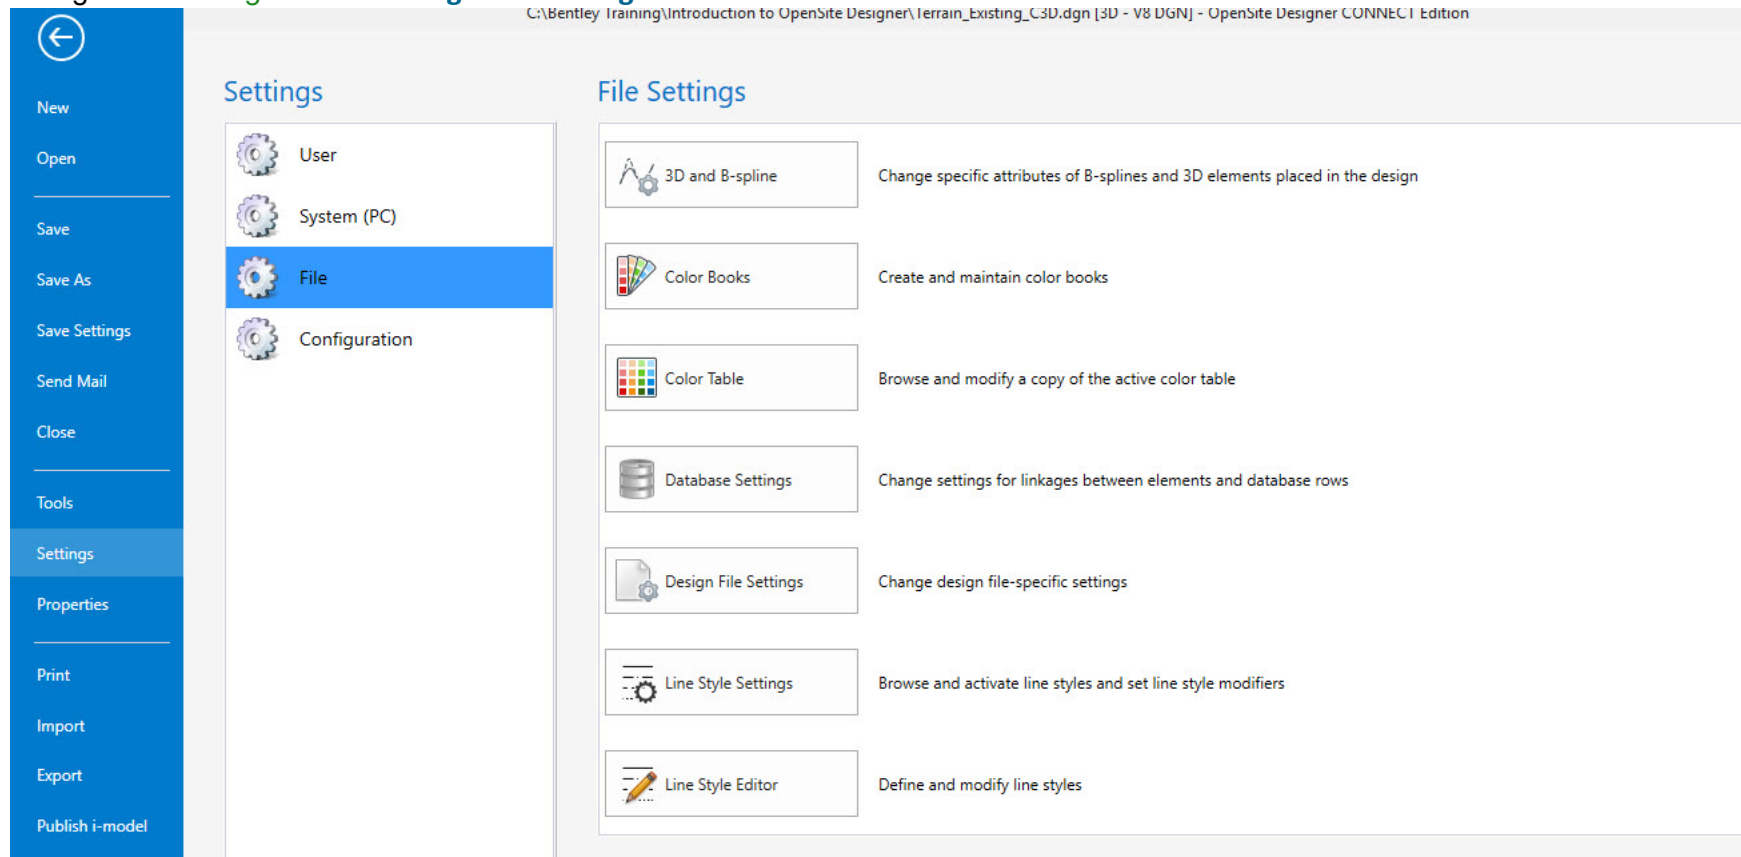

b. Select **Design File Settings**, the Design File Settings dialog will appear.


c. Select the *Working Units* category.

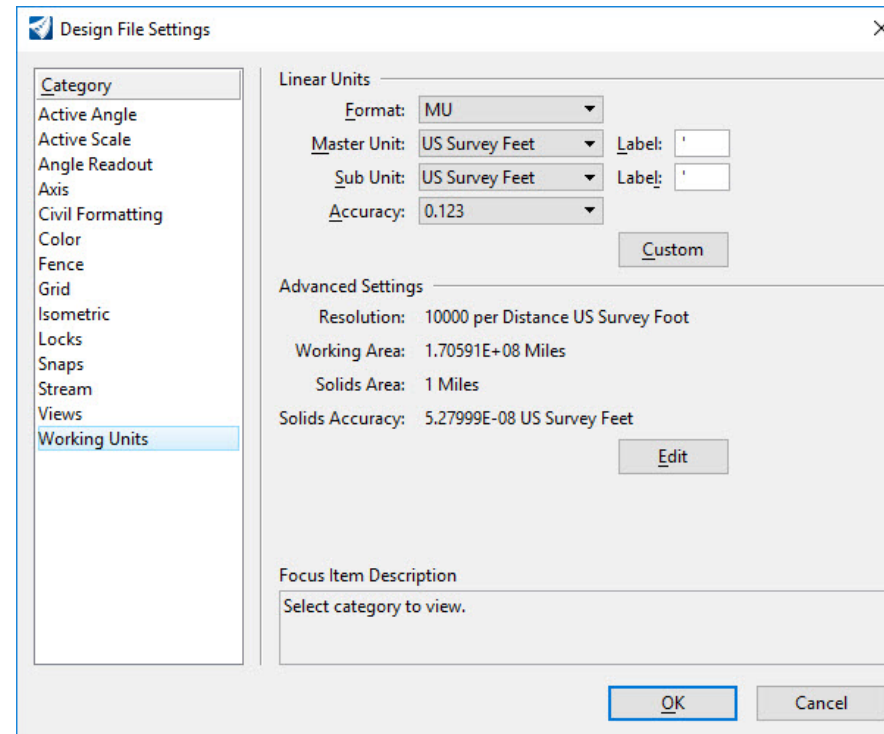


d. Review the *Linear Units* and *Advanced Settings*. The *Linear Units* settings are used for coordinate readout and display. The *Advanced Settings* control the units of resolution and the overall working area size of the design file.

e. Change the *Sub Unit* to **US Survey Feet** and change the *Label* to the foot symbol ' as shown in the image above.

2. Review and change the *Civil Formatting Coordinate Settings* to **Northing, Easting**.
 - a. Select *Civil Formatting*. This is used to control the formatting and display of civil geometry elements.
 - b. Change the **Coordinate Settings** format to *Northing, Easting*.

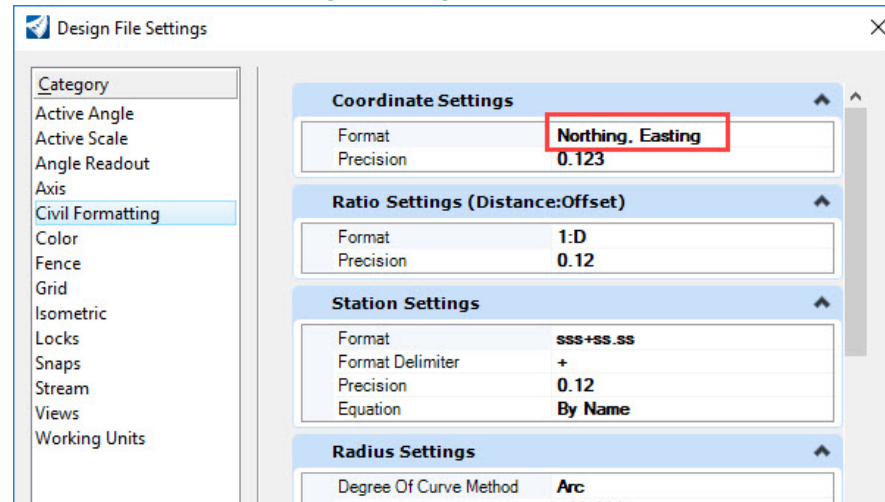


- c. Click **OK** to exit the **Design File Settings**.
- d. Select **Save Settings**  so that the changes you made are saved to the file.


Define the Geographic Coordinate System

Defining a Geographic Coordinate System is essential for properly locating the project in the world. Our site project is located in California so we need to define the proper Geographic Coordinate System for the site. In this section, you will learn how to define the geographic coordinate system.

1. Attach a Geographic Coordinate System.
 - a. Select the **Drawing** workflow from the drop down menu.



- b. Select the **Coordinate System** tool under the *Utilities* tab and *Geographic* group.

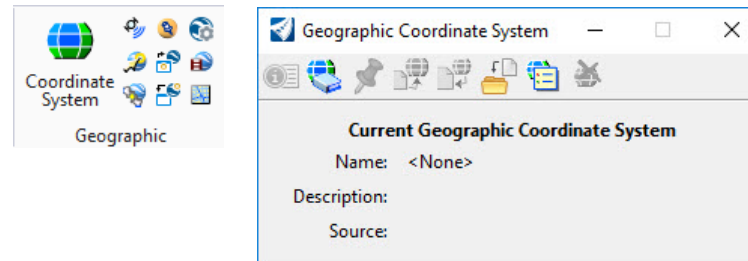

- We can see that the *Geographic Coordinate System* has not been set since we created this file using the seed file: **3D Imperial Design.dgn**. Our project is in California so we will need to change this.
- The *Geographic Coordinate System* lets the software know where the project is located geographically and what coordinate system needs to be defined for the project.

2. Change the Geographic Coordinate System to **NAD 1983 StatePlane California III FIPS 0403 Feet**




a. In the *Geographic Coordinate System* dialog, select **From Library**

b. When the *Select Geographic Coordinate System* window appears, select the **Search** tab.


c. In the **Search Text** field key-in: **EPSG:102643**.

d. Click the **Find Now** button, the software will search the Geographic Coordinate System library and return its results when finished.

e. Select **EPSG:102643**

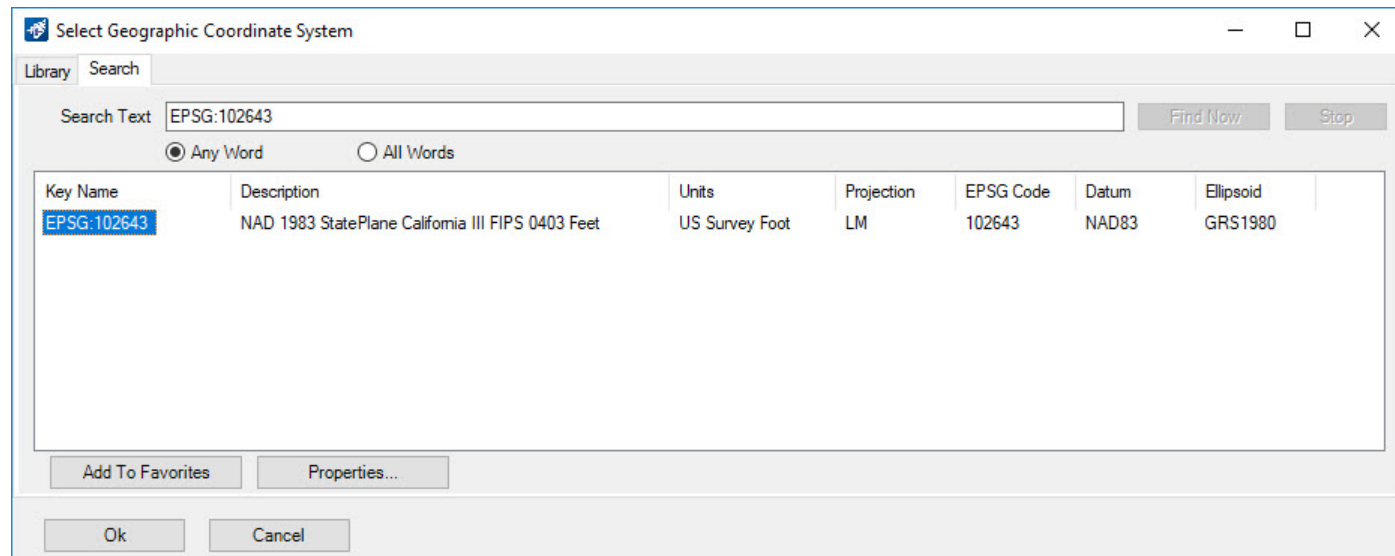

f. Click **OK**. The geographic coordinate system will now be attached.

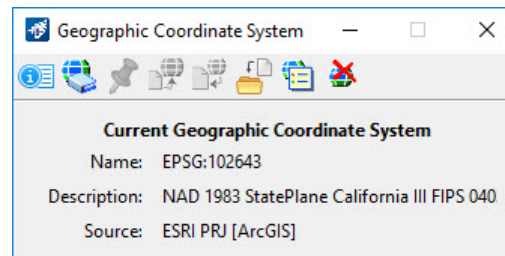

g. Close the *Geographic Coordinate System* dialog.




h. Select **Save Settings** located at the top of the Ribbon.


Import LandXML file and Create the Terrain Model

A majority of site projects must start with an existing ground surface. OpenSite surfaces are called Terrain Models. Terrain model data is stored and managed in a 3D design file. For this course we are going to import existing ground data from a LandXML file into the design file to create the existing ground terrain model.

1. Import existing ground data from LandXML file.
 - a. Change the Workflow to **OpenSite Modeling**.
 - b. Select **Terrain > Create > From File** (the *Select Files to Import* dialog will now appear).
 - c. Select the **Terrain_Existing.xml** file
 - d. Select **Done**. The *Import Terrain Model* dialog will appear.

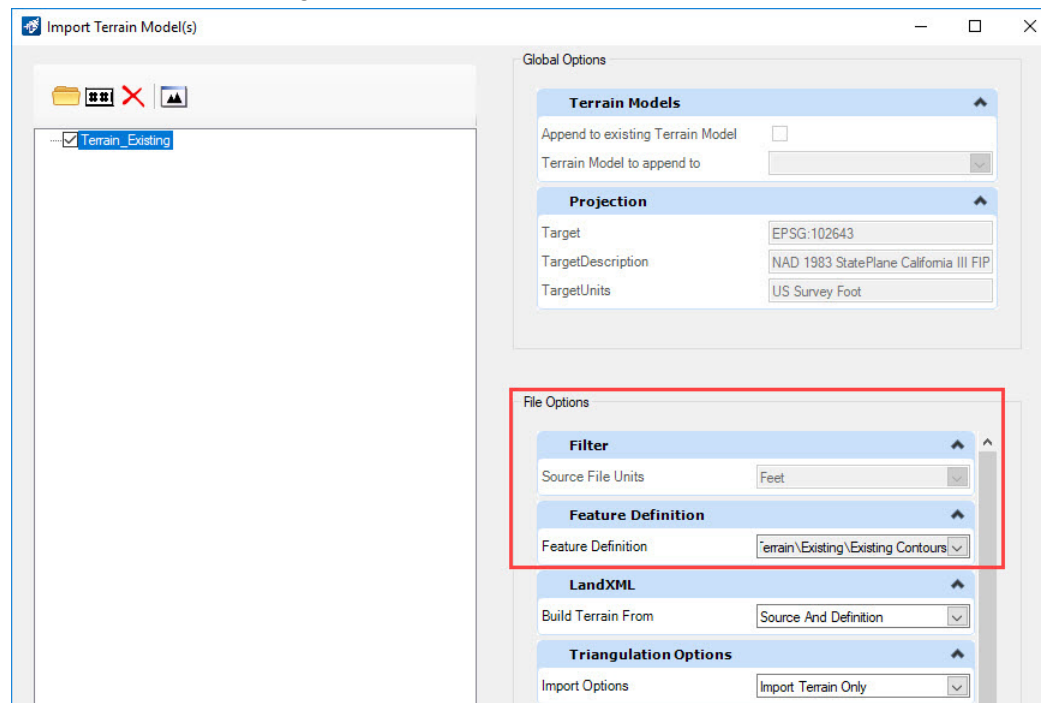

- e. In the *Feature Definition* panel, set the *Feature Definition* to **Existing Contours** by selecting the drop down arrow to view the *Feature Definition* list.

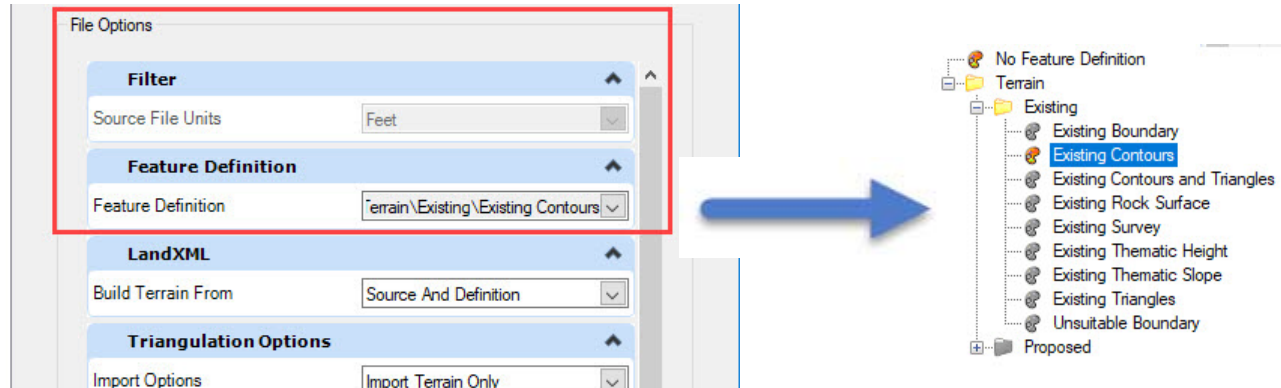

- f. Select *Terrain\Existing\Existing Contours*

Selecting the *Feature Definition* defines how the terrain model will be displayed once it is imported. In this case, the existing contours will be displayed.

- g. Be sure *Build Terrain From* is set to **Source and Definition** and *Import Options* is set to **Import Terrain Only**.



- h. Select **Import** to import the file.
- i. Close the *Import Terrain Model(s)* dialog.
- j. Select *Fit View* to view the existing terrain model.




- 2. Before we continue, let's be sure that the terrain model data was imported into the right place geographically. A good way to check this is to turn on the *Background Map* in the view (internet connection required to display background map).



- a. Select *View Attributes*.
- b. Expand the **Background Map** panel by clicking the down arrow.

c. Set the *Background Map Type* to **Aerial**.

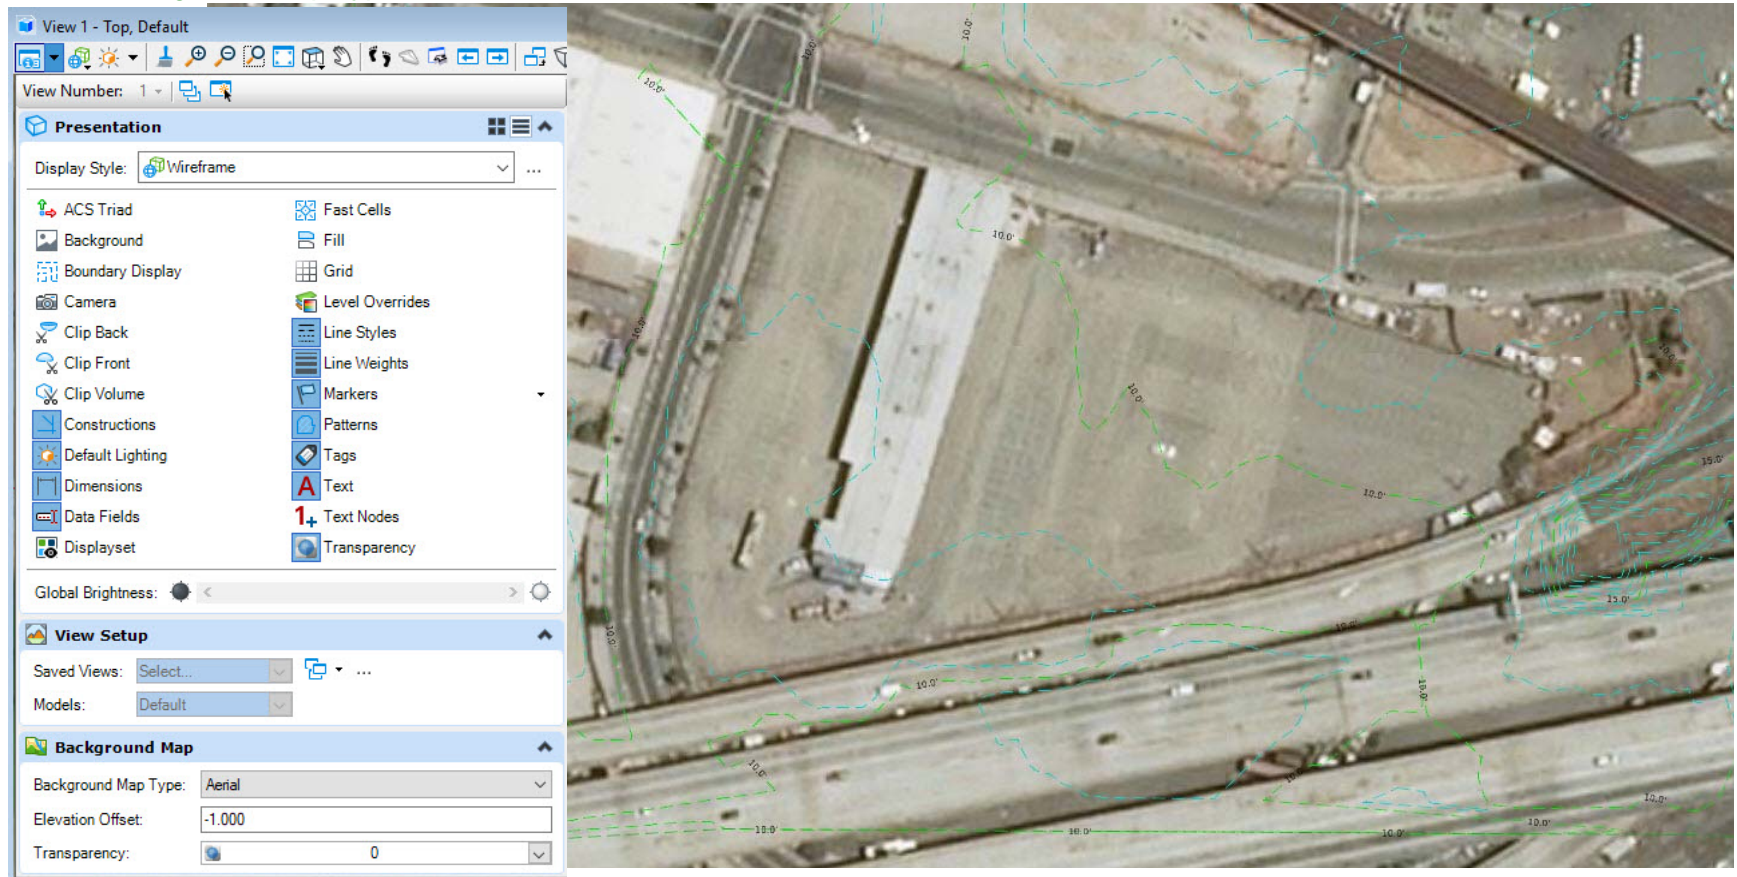

The aerial image will be automatically shown and you will see that the survey data lines up quite nicely as expected. The aerial image is being pulled from Bing Maps (internet connection required) and is utilizing the geographic coordinate system that is assigned to this design file.

d. After you have confirmed the terrain model is in the correct location. Turn **OFF** the background map by setting the type to **None**.

Attach Reference Files

In this section, you will learn to attach the existing terrain model (i.e. existing topography) and GIS parcel data as reference files. We will use these files to help layout the site. It is a best practice to attach terrain models as reference files when you need to use them for site design.




1. Select **Open** (located at the top of the ribbon).
2. Browse to *C:\Bentley Training\Introduction to OpenSite Designer* and Select **Site-Model.dgn** [*Metric-Site-Model.dgn*] (this is a blank 2D file that we will use for designing our site. Before we begin we will need to attach the existing terrain model and GIS parcel data).



3. Attach the existing terrain model file.




- a. From the ribbon menu select **Home > Primary > Attach Tools > References**
- b. Select **Attach Reference**
- c. Select the file *Terrain_Existing.dgn* [*Metric-Terrain_Existing.dgn*]
- d. Set **Attachment method** to *Coincident World*.
- e. Select **Open** to attach the file. The **Terrain_Existing.dgn** will now appear in the *References* dialog.

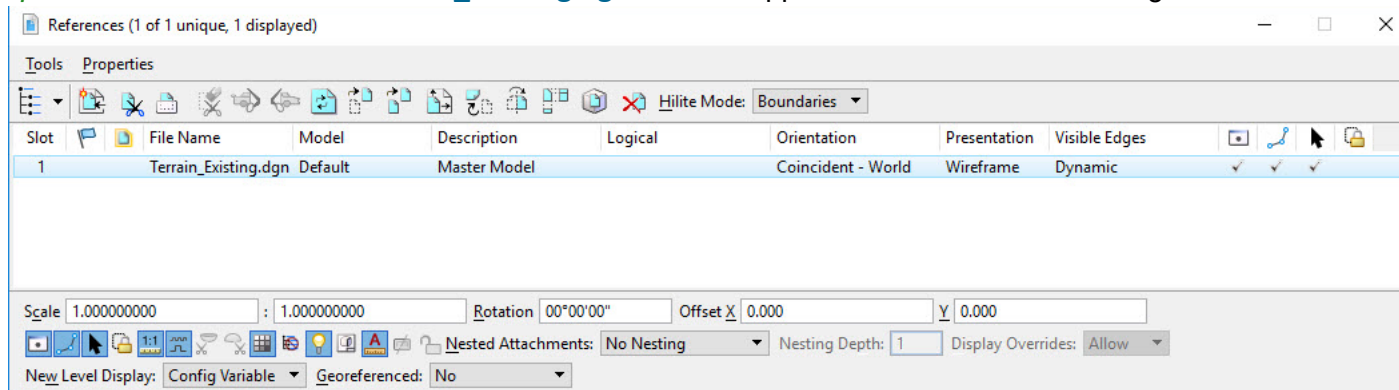

4. Review the existing terrain.




a. Click in *View 1* to make it active and select *Fit View*.

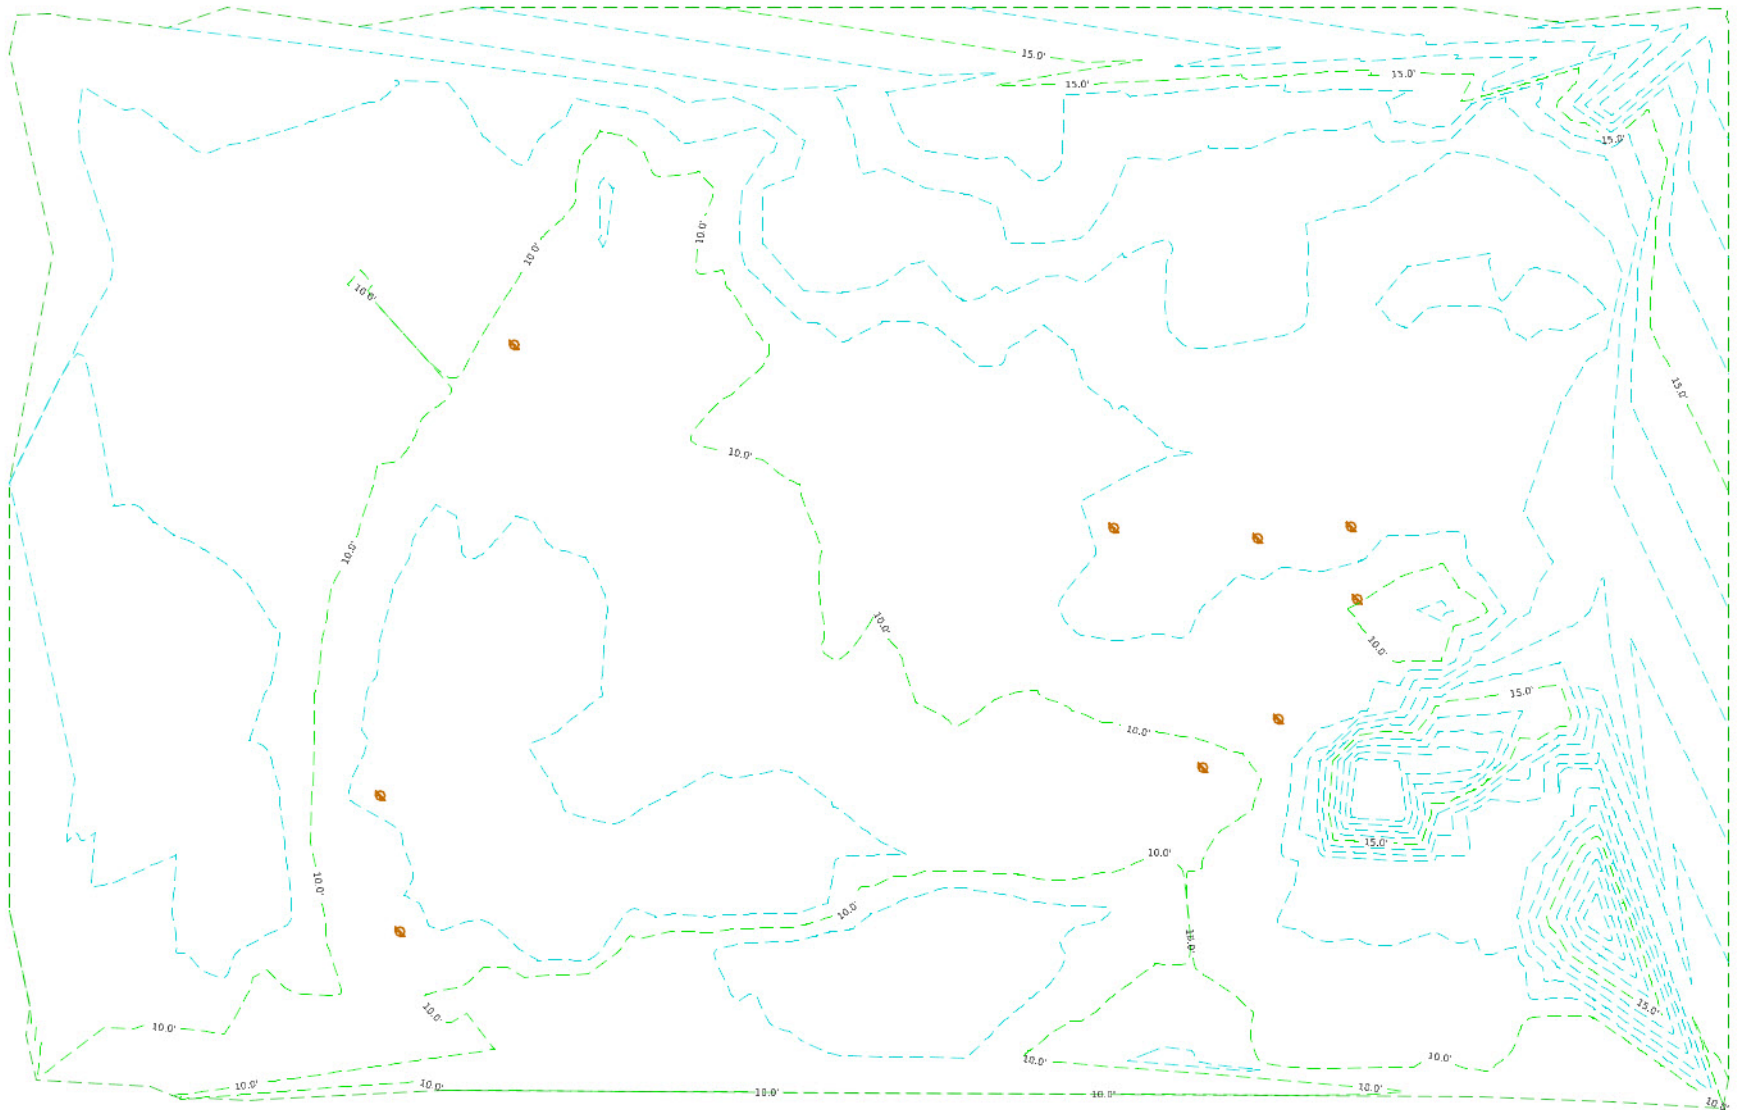

5. Using the *References* tool, attach the **GIS_Parcels.dgn** file.



- a. Select **Attach Reference**
- b. Select the file *GIS_Parcels.dgn*
- c. Set **Attachment method** to *Coincident World*.
- d. Select *Open* to attach the file.

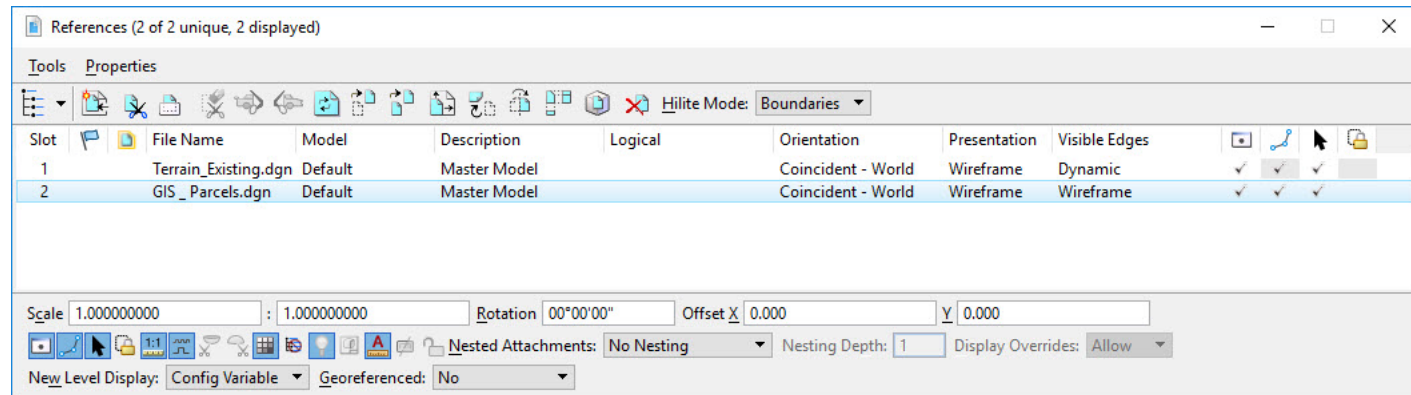


The **GIS_Parcels.dgn** is now attached.



- e. Close the *References* dialog.
6. Turn On the Background Map Aerial Imagery.



- a. Select *View Attributes*.
- b. Expand the **Background Map** panel by clicking the down arrow.
- c. Set the *Background Map Type* to **Aerial**.

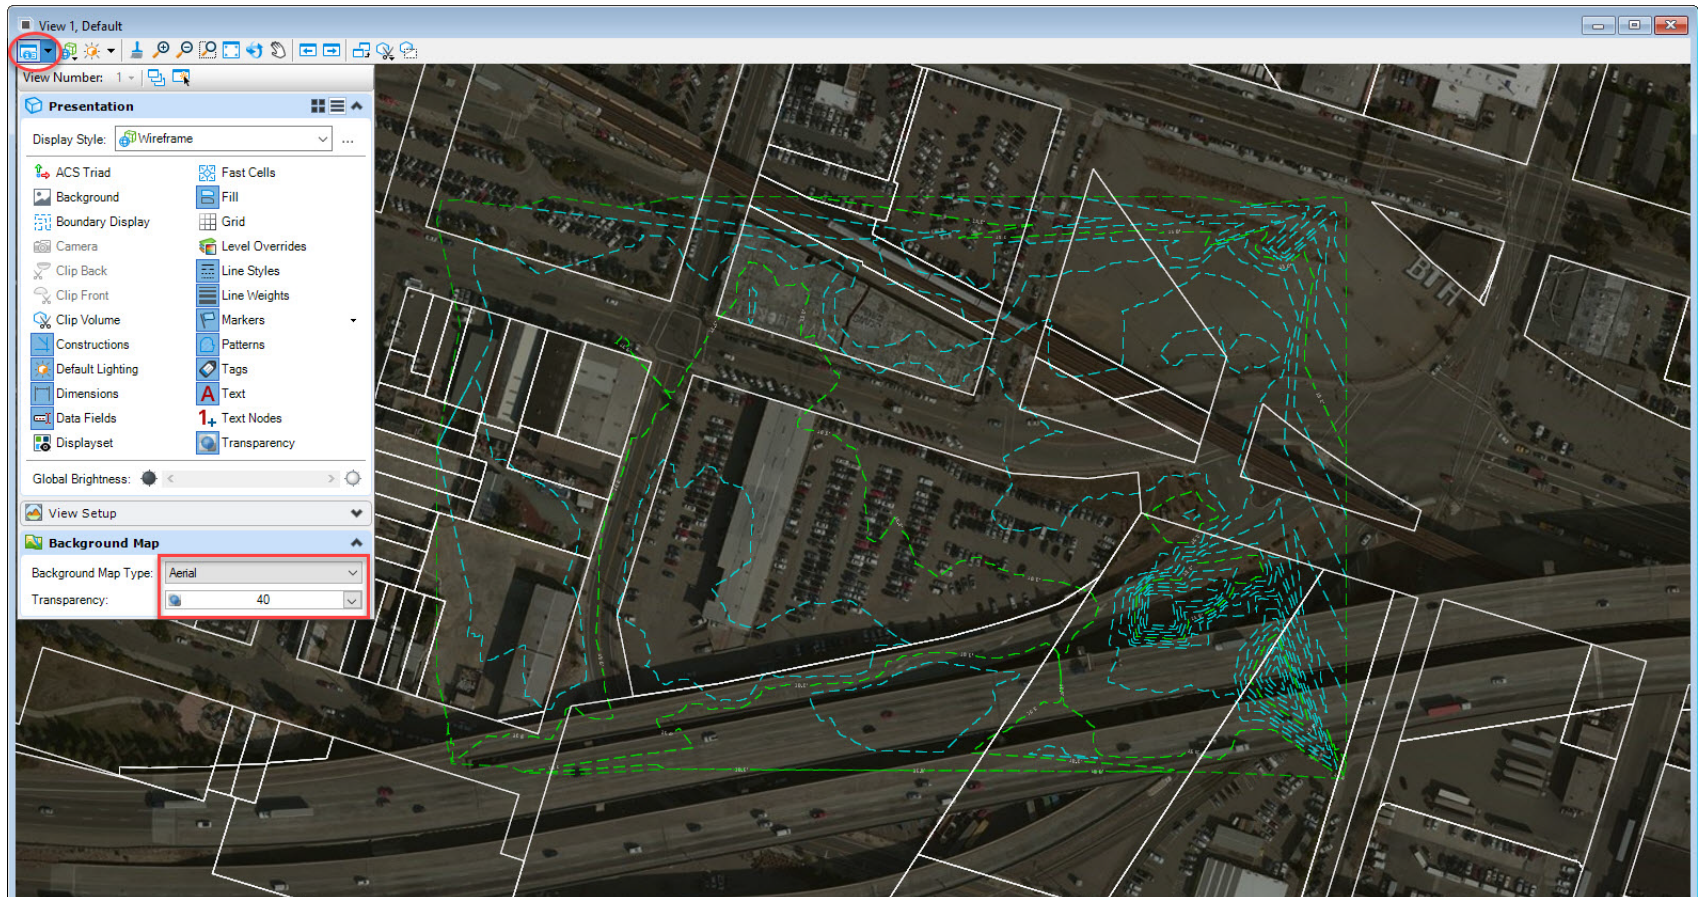


The next thing we need to do is set the terrain model active so the software knows that the existing terrain stored in the *Terrain_Existing.dgn* will serve as the foundation of our site design.

7. Set the Terrain Model Active.

a. Select the **Element Selection** tool from **Home > Selection > Element Selection**

b. Set the **Element Selection** tool to individual mode by selecting the individual and new icons.

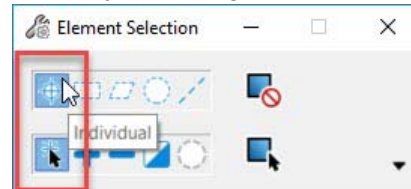

c. **Click** anywhere on the terrain model boundary. **Hover** your cursor at this location for a few seconds until the context sensitive menu appears.



d. Select **Set As Active Terrain Model**.

Note: Setting the Terrain Model active will automatically create a 3D Model if one does not already exist in the active design file.

Next we will take a quick look at reviewing the 3D model and setting up 2D and 3D views.

8. Set up and review the 2D and 3D Views and the existing terrain model 3D.


a. Press **F9** (or use *View Control* as described in step **b.** below).

- Notice the view windows will now have a 2D View and a 3D View. Even though this is a 2D dgn file, you have the ability to have 2D Models and 3D Models in the active dgn file.
- *View 1* is the *Default 2D* model and *View 2* is the *Default-3D* model (created automatically when you set the terrain model active).
- This view setup is typically desirable. Any time there is 3D information associated with elements, it will be displayed in the *Default-3D* model.

TIP: Always pay attention to which model is the active model.

b. Alternatively, you can **Right-click** in *View 1* and hold down the right mouse button to access special view control tools.

c. **Select** *View Control > 2 Views Plan/3D*

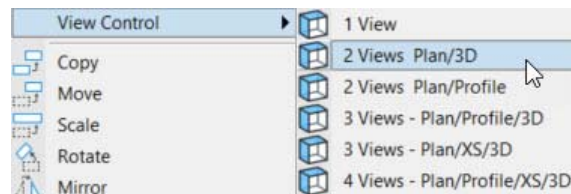

9. Review the existing terrain model displayed in *View 2*. The active terrain model can be viewed in the 3D Model. It is also referenced into the 2D model as well. What you see in *View 1* is actually a reference of the 3D Model.

10. Close *View 2*, since we will not be working with anything in the 3D model just yet. We will deal with creating 3D elements later in the course.

11. Maximize the *View 1* window.

Exercise 2: Design Site Layout

In this exercise, you will learn how to create a site plan consisting of the site project limits, parking lots, building footprint, main drive and connecting drives. The exercise will also cover how to make some object revisions.

Skills Taught

- Create Site Project Boundary
- Create Building Footprint
- Create and Edit Main Drive
- Create and Edit Parking Lots
- Review Site Layout Settings
- Review Site Feature Properties with Explorer
- Create and Edit Parking Lot Drive Connectors

Create Site Project Boundary

In this section you will learn how to create the site project boundary by picking property points. The site project boundary is created using a tool called *Limits of Disturbance*. The boundary can be created by graphically picking points, flooding an existing shape or picking a previous drawn shape.

1. Define the site project boundary using property points as a guide.
 - a. Select *Site Layout > Grading Proposed > Limits of Disturbance*
 - b. Set the *Feature Definition* to: **Site_Boundary_LOD**
 - c. Set the *Name Prefix* to: **BND_LOD**
 - d. Follow the heads-up prompts:
 - *Method*: **Pick Points**
 - *Enter First PI*: Use the image below as a guide. Beginning in the southwest corner and moving in a clockwise direction, start picking the property points drawn in the file.
 - Once the last point is selected, **click right mouse button** to create site project limits.



Once the property boundary has been placed you'll notice setback lines have also been created (the setback lines are drawn as dashed lines).

As site features are placed, rules and relationships known as Design Intent are being formed. Design Intent allows for the intelligent updating of features as you make changes. Now we will learn how to make some simple changes.



The next thing we need to do is adjust the Setback Distance to match zoning requirements.

2. For this project change the Building Setback Distance to **10.0** and Parking Setbacks distances to a value of **5.0**.

a. Using the *Element Selection* tool, select the site project limits.

b. Zoom into the southwest corner of the project limits until you see the parking and setback distances.



- c. To change the setback distances, click on each setback text value and key-in new values. You will have to do this for every value displayed for each setback.
- d. Continue changing setback distances by working your way around each side of the site project. You will have to zoom in and out as you go along.
- e. Be sure to change the value for both the parking and building setback distances.


The completed adjusted site project limits should now look like the image below.



Create Building Footprint


Depending on the type of project a desired building footprint may be known. For this project we are going to reference a footprint that was designed in OpenBuildings and provided to us by the Architect. The building footprint is geolocated and will be located at the Architect's desired location.

1. Using the *References* tool, attach the **Bldg_Footprint.dgn** file.
 - a. From the ribbon menu select **Home > Primary > Attach Tools > References**
 - b. Select **Attach Reference**.
 - c. Select the file **Bldg_Footprint.dgn**.
 - d. Set **Attachment method** to *Coincident World*.
 - e. Select *Open* to attach the file.

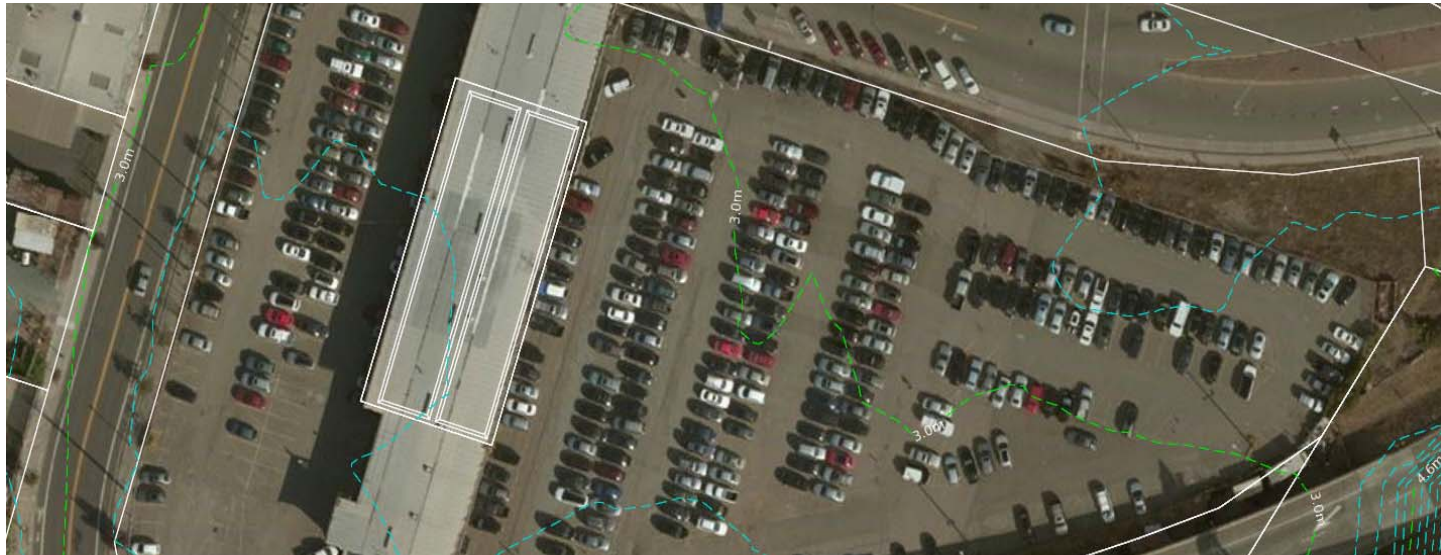



2. Now that the building footprint has been attached we need to define the building footprint with OpenSite Modeling tools.
 - a. Select **Site Layout > Pad > Building**
 - b. Set the *Feature Definition* to **Building Footprint > Site_Building**
 - c. Set the *Name Prefix* to **BLDG**
 - d. Follow the heads-up prompts:
 - *Method*: Pick Points
 - *Enter First PI*: Pick the southwest corner of the building to place the first PI point.
 - *Enter Next PI/Back Radius*: Continue clockwise and pick the northwest corner of the building to place the second PI point.
 - *Enter Next PI/Back Radius*: Pick the northeast corner of the building to place the third PI point.
 - *Enter Next PI/Back Radius*: Pick the southeast corner of the building to place the third PI point.
 - e. Right click to complete.
 - f. Right click again to exit the command.
3. Now that the building footprint has been defined we can turn off the building footprint reference file.
 - a. Select **Home > Primary > Attach Tools**, the *References* dialog will appear.
 - b. Select the *Bldg_Footprint.dgn*
 - c. Select the **Display** tool to turn off the reference file.
 - d. Close the *References* dialog.

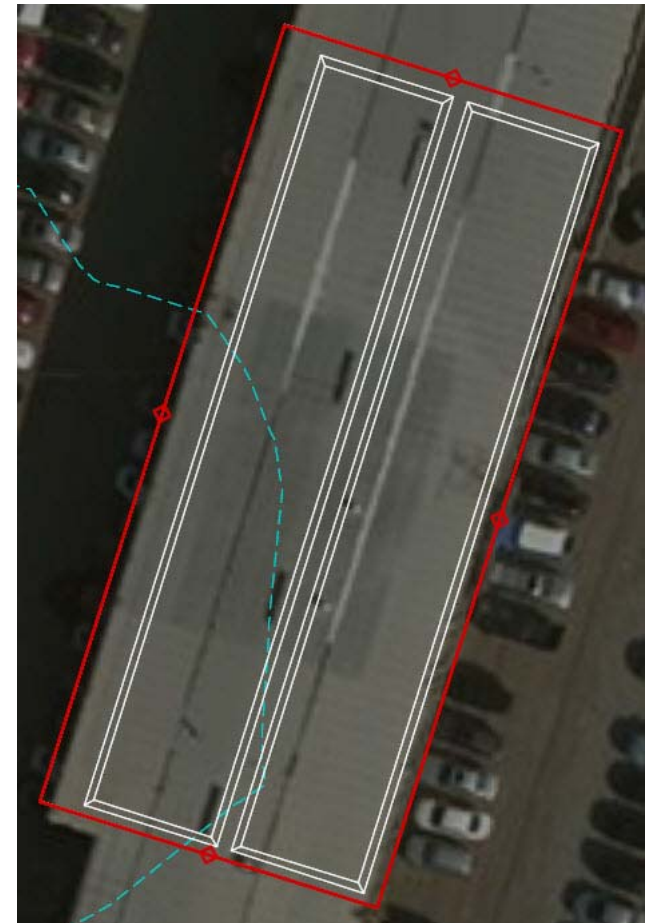

Create Main Drive

For this project there will be a main drive that runs through the project starting at the intersection to the north and terminating into the roadway on west side of project. In this section, you will learn how to create the main drive.

1. Layout the driveway using the image below as guide. You may need to zoom in to see more detail of the aerial image.



- a. Select **Site Layout > Pathway > Driveway**
- b. Set the *Feature Definition* to **Driveway > Site_Driveway_Light_Duty_Full_Depth_Asphalt**
- c. Set the *Name Prefix* to **DRIVE**
- d. Follow the heads-up prompts and using the aerial image as a guide:
 - *Method*: Pick Points
 - *Enter First PI*: Pick starting point being edge of pavement at the intersection on the north boundary of project.
 - *Enter Next PI/Back Radius*: Move your cursor southwest approximately **200'** [60] to place the second PI point.
 - *Enter Next PI/Back Radius*: Move your cursor southwest and parallel with the property line approximately **200'** [60] to place the third PI point.
 - *Enter Next PI/Back Radius*: Move your cursor northwest and parallel to the south building face and pick the edge of pavement as the last PI point.
- e. Right click to complete.


f. Right click again to exit the command.

2. Now that the drive has been placed, change the radius for each curve to **50'** [15].



a. Select the drive, the dynamic text manipulators will now be displayed and available for in-place editing.

Also, note the drive width values and graphical manipulators along the driveway centerline. The graphical manipulators allow you to move the driveway as needed. The triangle manipulators give you access to the design properties for the left and right side of the driveway. You can use those manipulators to make changes to the default design values (i.e. change lane width, cross slope, add tapers, medians, etc).

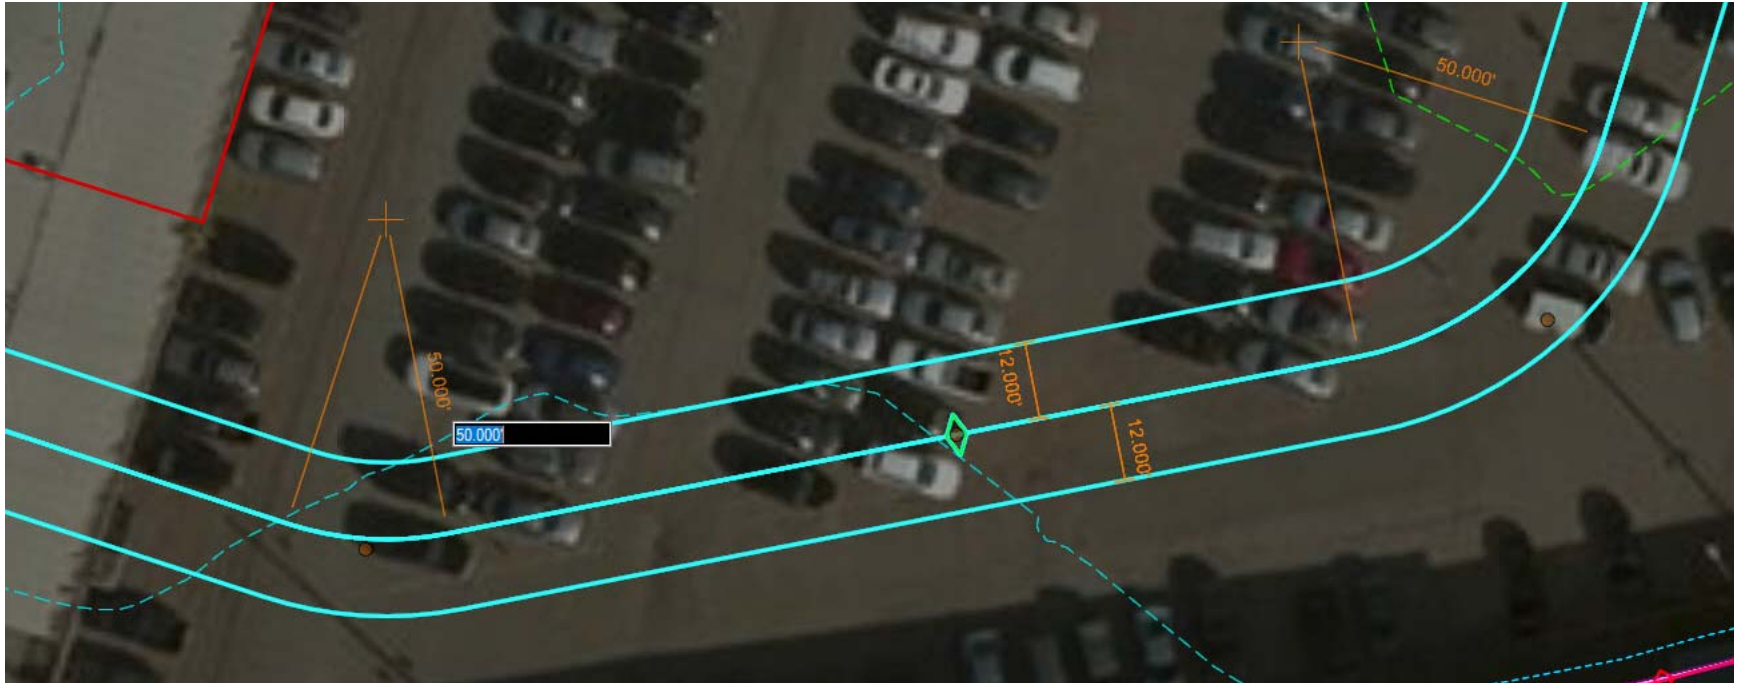

b. Hover your cursor over the curve PI manipulator until the radius manipulators appear.

c. Click on the radius value manipulators (they will be displayed as 0) and change them to **50'** [15].

The centerline geometry will update and the edges of the driveway will now follow the updated geometry.

Create Parking Lots

For this project there will be two parking lots with two drive connectors. This exercise will go through how to create parking lots and how to place and revise drives.



1. Layout the parking lot using the image as a guide.

- a. Select **Site Layout > Parking > Parking Lot**
- b. Set the *Feature Definition* to **Parking Lot > Site_Parking_Light_Duty_Full_Depth_Asphalt**

c. Set the *Name Prefix* to **PRK_LOT**

d. Follow the heads-up prompts and using the aerial image as a guide:

- *Method*: Pick Points
- *Enter First PI*: Pick the southeast corner of the building.
- *Enter Next PI/Back Radius*: Move your cursor parallel along the back face of the building and pick a point on the building setback line.
- *Enter Next PI/Back Radius*: Move your cursor southeast along the property line a distance of approximately **180'** [55].
- *Enter Next PI/Back Radius*: Follow the main drive to south until first turn and pick next point.
- *Enter Next PI/Back Radius*: Follow the main drive to the southwest and set point in line with south side of building

e. Right click to complete and right click again to exit the command.

The parking lot design will be automatically created based on design standards that are defined in the *Site Layout Settings*. These settings can be changed at anytime during the design process.



2. Now that the main parking lot area is complete we will now place a front parking lot area. Use the image below as a guide.



- f. Select **Site Layout > Parking > Parking Lot**
- g. Set the *Feature Definition* to **Parking Lot > Site_Parking_Light_Duty_Full_Depth_Asphalt**
- h. Set the *Name Prefix* to **PRK_LOT_FRONT**
- i. Follow the heads-up prompts:
 - *Method*: Pick Points
 - *Enter First PI*: Pick the southwest corner of the building.
 - *Enter Next PI/Back Radius*: Following along the west face of the building pick the northwest corner of the building.
 - *Enter Next PI/Back Radius*: Set the next point approximately **60.1' [18]** from the previous point.
 - *Enter Next PI/Back Radius*: Next create the western side of parking by drawing the next segment **159' [48]** long at a right angle from previous segment.
- j. Right click to complete and then Right click again to exit the command.

3. The short end of front parking area needs to be revised to remove parking spaces.

- a. Zoom in to the northeastern edge of the front parking lot
- b. Select the 3 space parking area. Once selected the dynamic text will appear.
- c. Hover your cursor over one of the parking space elements, the *Properties* tool will appear.



- d. Select *Properties*.




- e. In the *Properties* panel, change *Has Parking* from True to **False**. This will remove parking stalls along north edge of parking.

Link Height	0.000'
Has Parking	False
Space Count	False
Parking Width	True
Parking Depth	18.000'
Parking Angle	90°00'00.0"
Has Aisle	True
Aisle Width	24.000'
Spaces Per Island	0
Island Width	8.000'
Island Curb Radius	0.000'
Index	1
Parent Name	
Parent Type	Parking Lot
Has Curb	True
Curb Height	0.500'



The *Properties* tool can be used to make changes to any site feature at any time. Notice the various fields available for editing (*Has Aisle*, *Aisle Width*, *Has Curb*, *Curb Height*, etc.) simply click in the property field that you would like to adjust and the site feature will update automatically.

- f. Repeat the process to remove the 3 parking spaces along the southern edge of the parking lot.

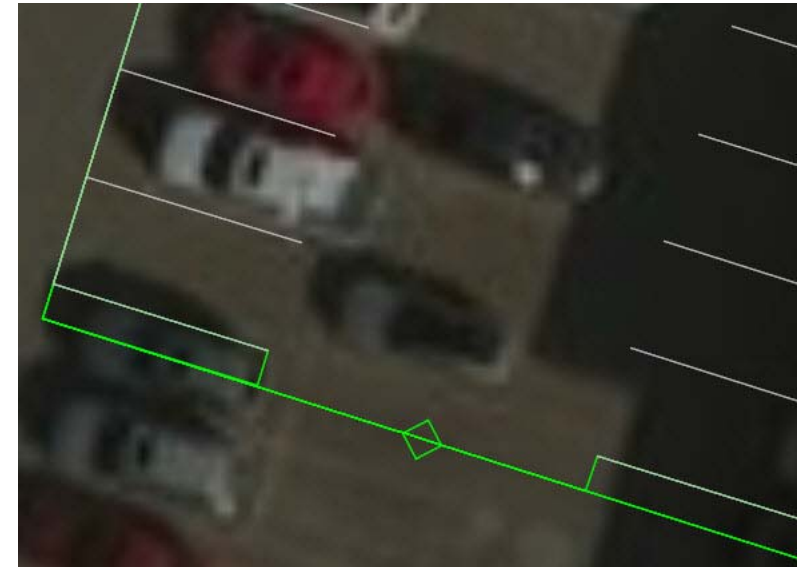

When we first placed the parking lot you may have noticed we didn't enter any design or layout information. We simply drew some shapes and all of the parking spaces, islands and aisles were created automatically in a logical manner. This is by design. OpenSite has predefined design standards and layout properties that are configured in the *Site Layout Settings*.

Parking Depth	18.000'
Parking Angle	90°00'00.0"

Aisle

Aisle Width 24.000'

Islands

Has Islands	False
Spaces Per Island	20
Minimum Island Width	8.000'
Bay Curb Radius	5.000'
Island Curb Radius	0.000'
Island Type	Landscaped

Grading

Pavement Minimum Slope	1.00%
Pavement Maximum Slope	4.00%
Pavement Surface Type	Light Paving
Pavement Surface Depth	8.000'

- Design Standards
- Terrain Filters
- Survey Settings
- Site Layout Settings**
 - Site Defaults**
 - Pad Default Properties
 - Driveway Default Properties
 - Parking Lot Default Properties**
 - Area**
 - Side
 - Bay Point
 - Aisle Point
 - Space Point
 - Island Point
 - Building Footprint Default Properties
 - Utility Filters


Review Site Layout Settings in Explorer

The default design standards and layout settings for the parking lot are defined in the *Site Layout Settings* which can be found in the *OpenSite Standards* panel in the *Explorer*. The *Site Layout Settings* contains all of the default rules for how site objects and features get built.

1. Open *Explorer* and review the *Site Layout Settings* for the parking lot.
 - a. Select *Explorer* (located in the upper left corner of the ribbon).
 - b. Navigate to *OpenSite Standards* pane and expand the pane by clicking on the down arrow.
 - c. Expand the *Standards* category by clicking the arrow on the left.
 - d. Select *Site-Model.dgn (Default)* and expand the list until you can see the *Site Layout Settings*.
 - e. Expand *Site Layout Settings* until you see all of the site settings as listed in the image to the right.

This area is where all of the design standards and layout settings are defined for the various site objects.

2. Review the design standards and layout settings for the Parking Lot Area.
 - a. Select *Area* category listed under *Parking Lot Default Properties*.
 - b. Right click and select *Properties* to review the design standards and layout settings for the parking area.
 - c. Close the *Properties* pane.

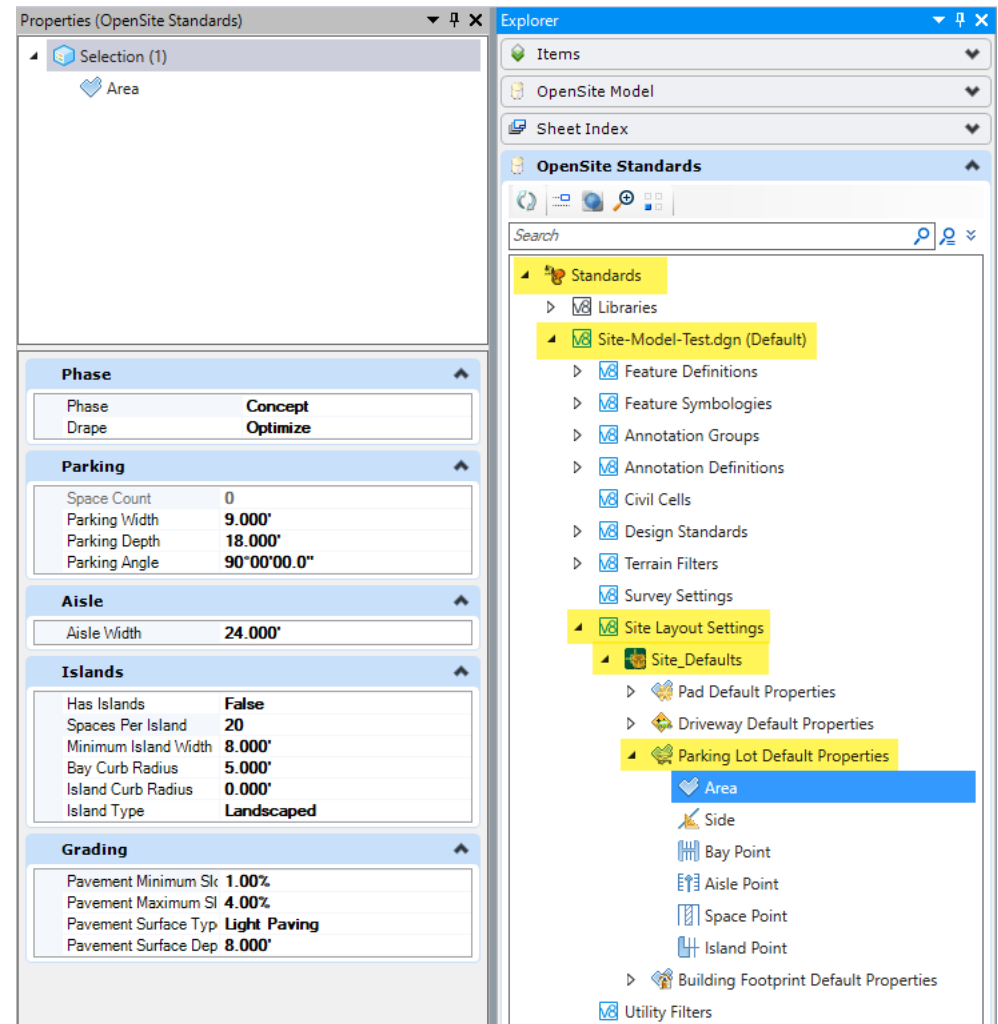

Review Site Objects in Explorer

As you build site objects and features they are managed and organized in the **OpenSite Model** within the **Explorer** tool. The **OpenSite Model** gives you detailed information and access to each site object and its associated features.

1. Review Site Objects.


- Navigate to the **Explorer** tool on the left side of the screen.
- Click on the down arrow to the right of the **OpenSite Model** panel to expand the panel.
- Expand **Site Layout**. You will now be able to see all of the OpenSite object categories near the bottom of the list.
- Click the arrow next to each site object category to further expand the list until you see all of the site objects that make up our site.
- Select the site object named **BLDG**, this is the building object. Notice that when you select the object it highlights in **View 1**.

Most site projects have several site objects and these objects sometimes can be hard to find in the design file. Simply selecting objects from the list makes it easy to locate in the file for when you need to make changes.

- Right click on **BLDG** and select **Zoom to**. The **BLDG** object will highlight and the view will zoom in and center on the building object.

The right click functionality can also be used to dig deeper into a site elements design parameters to make changes via the **Properties** tool.

- Right Click on **BLDG** and select **Properties**. Note the design properties: **Phase**, **Grading**, **Feature**, **Building**, **Type**, etc. Any of these design parameters can be changed at any time and the layout will automatically update.
- Close the **Properties** pane.

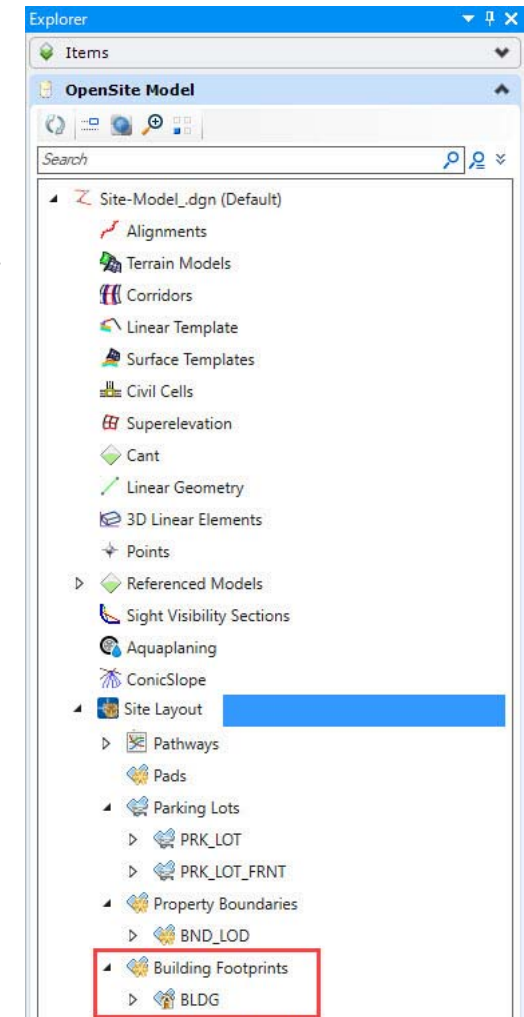

Drive Connector from Parking Lot to Main Drive

With Main Drive and Parking Lots created a connection point between the two need to be created. The driveway tool will be used to make this connection.



1. Select **Site Layout > Pathway > Driveway**

a. Set the *Feature Definition* to **Driveway > Site_Driveway_Light_Duty_Full_Depth_Asphalt**

b. Set the *Name Prefix* to **DriveConn1**

c. Follow the heads-up prompts:

- *Method*: Pick Points
- *Enter First PI*: Using the mid-point snap, pick the mid-point along the southern edge of the front parking lot.
- *Enter Next PI/Back Radius*: Using the nearest snap, pick a point on the main drive along the north edge of the drive.

d. Right click to complete.

e. Right click again to exit the command.

Note: The drive will be created using design settings found in the *Site Layout Settings*. The *Site Layout Settings* contains all of the default rules for how site objects and features get built.



2. Repeat the same process to create a drive that connects the rear parking lot at the mid-point to the main drive.
 - a. Set the *Feature Definition* to **Driveway > Site_Driveway_Light_Duty_Full_Depth_Asphalt**
 - b. Set the *Name Prefix* to **DriveConn2**
 - c. Follow the heads-up prompts:
 - *Method*: Pick Points
 - *Enter First PI*: Using the mid-point snap, pick the mid-point along the eastern edge of the rear parking lot.
 - *Enter Next PI/Back Radius*: Using nearest point snap, pick a point on main drive along the north edge of the drive.
 - d. Right click to complete.
 - e. Right click again to exit the command.




Note: If your drive does not display it is because there is not enough room between the main drive and the parking lot. You will have to move the parking lot edge to the west a few feet in order to construct the drive.

3. If the drive did not display, follow the steps on the next page to adjust the parking lot.

4. Review the Parking Lot and move the eastern edge of the parking lot a little farther west away from the main drive.

a. Using the element selection tool, select the Parking Lot.

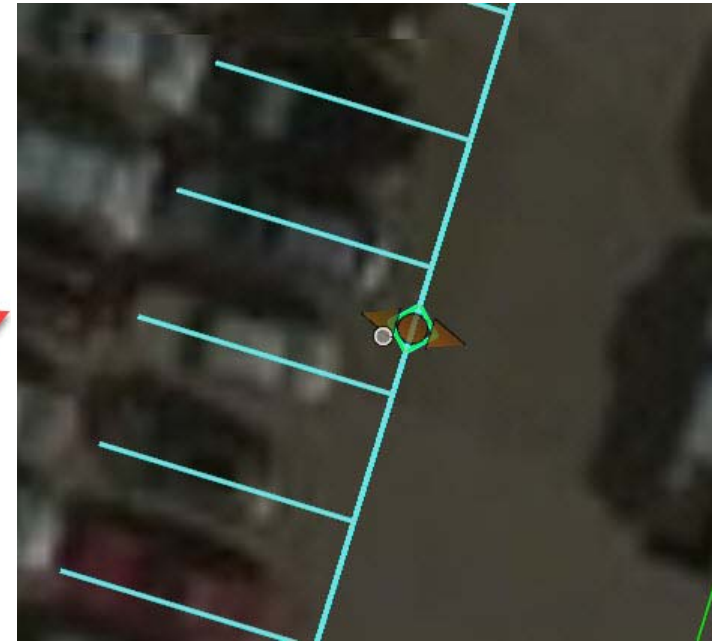

b. Hover your cursor over the diamond shaped manipulator near the mid-point along the eastern edge of the parking lot. This allows you to adjust either the inside or outside of the parking lot.

c. Select the arrow that points toward the inside of the parking lot and move it a few feet west to create more space between the parking lot and main drive. Use the image above as a guide.

- The entire parking lot will update and the new connector driveway will appear now.
- If the new connector driveway does not appear, you may need to place another drive between the parking and main drive.

5. Change the radius returns at the main drive.
 - a. Select the end of the drive located at edge of main driveway. A magenta **X** will highlight the point at the end of connection line.
 - b. Select this **X** manipulator.
 - c. Hover the cursor over the **X** and select *Properties*.
 - d. The *Properties* panel will show design controls for the drive point.
 - e. Change the *Entrance Flares Radius* to **2**.
 - f. Change the *Exit Flare Radius* to **2**. The radius returns will update.





<- Name ->	Drive2
Index	0
Entrance Flare Radius	2.0000
Exit Flare Radius	2.0000
Transition Length	0.0000
Inner Radius	0.0000
Outer Radius	0.0000
Transition Length	0.0000
Inner Radius	0.0000
Outer Radius	0.0000

6. Change the radius returns at the parking lot.
 - a. Select the end of the driveway located at the edge of the parking lot. A magenta **X** will highlight the point at the end of connection line.
 - b. Select this **X** manipulator.
 - c. Hover the cursor over the **X** and select *Properties*.
 - d. The *Properties* panel will show design controls for the drive point.
 - e. Change the *Entrance Flares Radius* to **2**.
 - f. Change the *Exit Flare Radius* to **2**. The radius returns will update.



The length of the driveway will also adjust. You may need to extend the driveway using the manipulators if the radius returns undisplay.

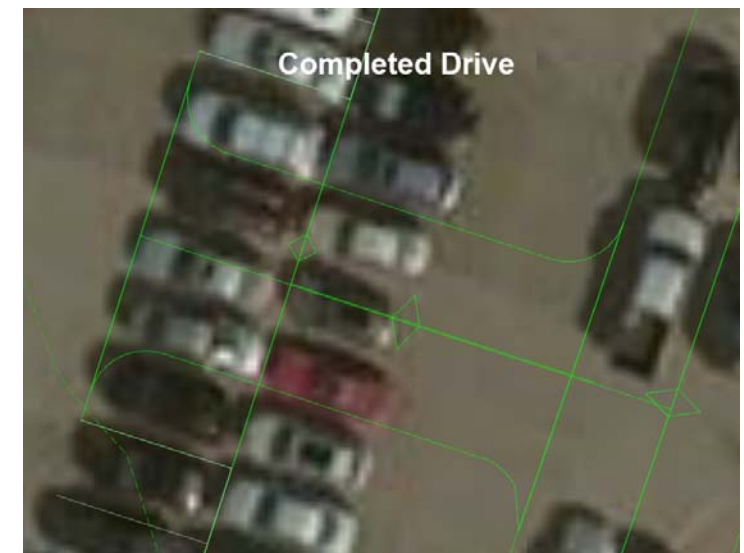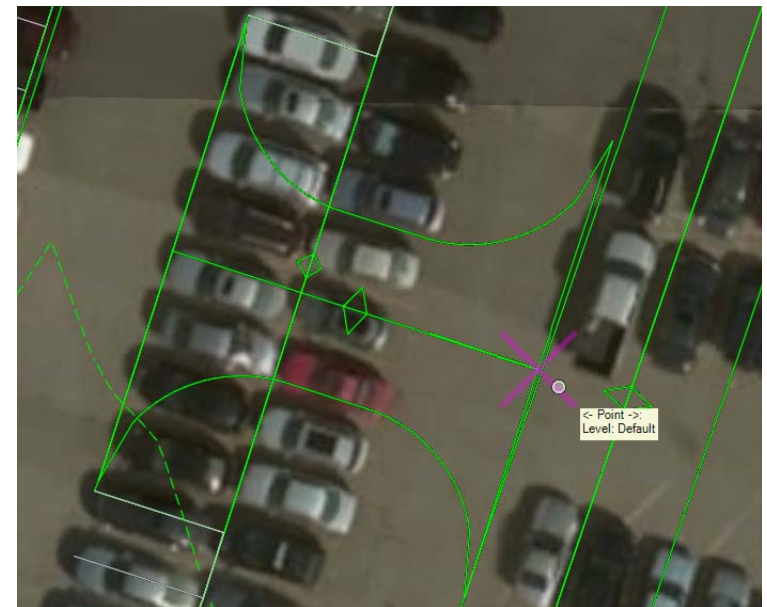

Exercise 3: Project Grading

In this exercise you will learn about optimized grading performed by the Grading Solver.

Skills Taught

- Grading Solver
- Optimize Project Grading
- How to Modify the Phase
- 3D Model and Cross Section Review
- Linear Templates


Project Grading

With the conceptual site plan complete the next step is to create the grading for the project. Grading will allow a better understanding of feasibility of the conceptual layout.

1. Open 3D Model View and create the project grading.


- a. Press **F9** on your keyboard, this will open 3D Model in *View 2*. Currently, the only 3D data that exists in the 3D model is the existing terrain.

We are now going to run the Grading Solver which will analyze the conceptual horizontal layout against the existing terrain and determine the optimized grading and also create vertical geometry and 3D features of the conceptual design.



- b. Select **Site Layout > Grading Proposed > Grading Solver**

Once selected another window will open to show the site going through grading optimization.

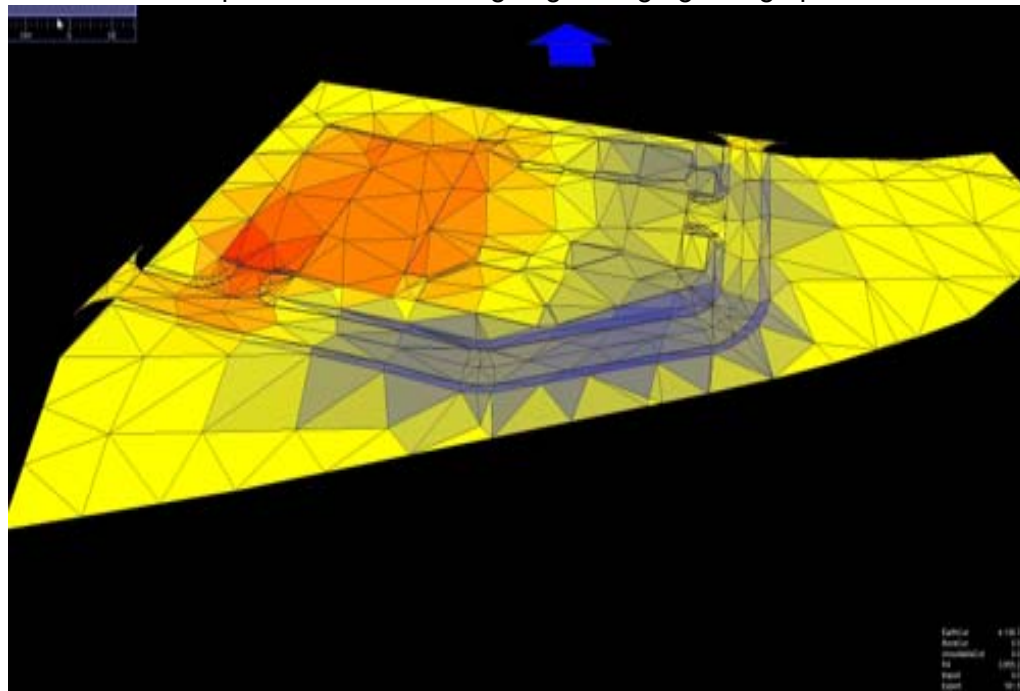

Once the grading optimization is complete the results will be displayed in the *Landscape 3D Viewer* and 3D features will be created in the 3D Model. The optimized cut and fill quantities are also displayed in the lower right portion of the screen.


The Landscape 3D Viewer is used to analyze the results of the grading optimization.

2. Review the grading optimization results in the *Landscape 3D Viewer* window.
 - a. Select the **Boundary** and **Contours** toggle at the bottom of the viewer to change the display to a color coded representation of the design.


The toggles at the bottom of grading viewer will control what information is shown.

- Type of Surface show (i.e. Graded, original, graded & original, etc.)
- Surface Triangles
- Surface
- Boundaries (colored representation of design)
- Contours
- Scale
- Lower right hand corner shows amount of earthwork being done.

- b. Press the letter **C** on your keyboard to see a rough cost estimate.

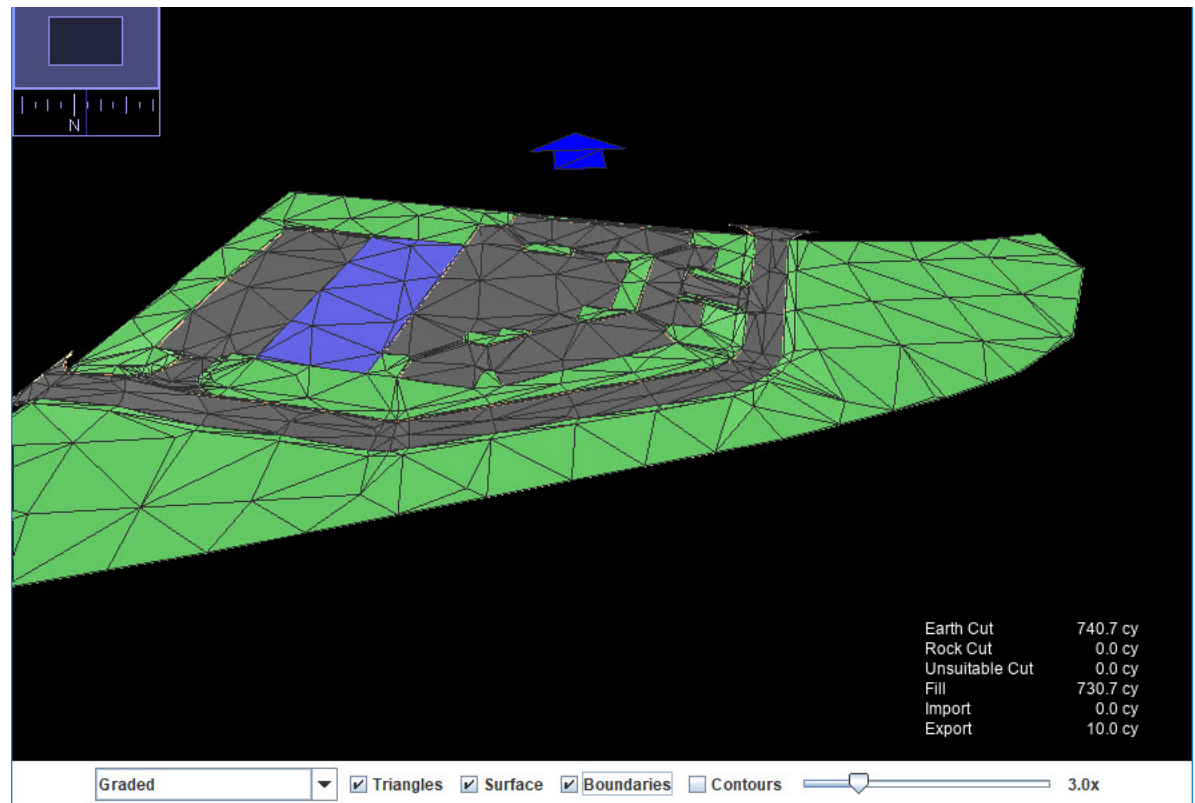

3. Review the Contours and 3D Model.

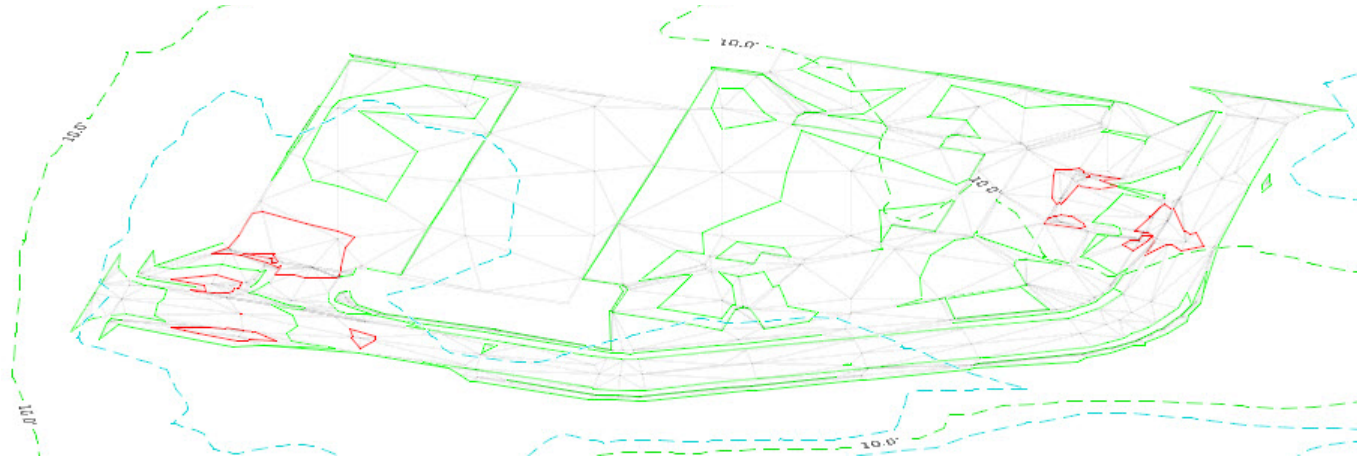

Notice the 3D Model does not show a lot detail. This is because all of the site elements were placed using the default Phase of *Concept* (only terrain models will be created for each site object). To see a more detailed 3D model you need to change the Phase for each site object from *Concept* to *Preliminary* (terrain models with surface templates will be created) or *Final* (terrain models with surface templates and linear templates will be created).

OpenSite elements can be placed as: *Concept*, *Preliminary* or *Final*.

- *Concept* and *Preliminary* are tied directly to the grading solver. As you make changes the grading solver will still optimize the site.
- *Final* is used to fine tune the design and allows the user to make user defined changes that does not affect the results of the grading solver.


4. Change the Phase to Final.



- In *View 1*, using the element selection tool, select all of the site elements (You should have a total of six elements).
- Select **Modify > Modify Phase**
- Select *Final*.

When you select *Final*, terrain models and surface templates are applied to the site elements and you now get a more detailed 3D model.

5. Review the 3D Model. Now you will see more detail. You will see that the building footprint will have a concrete material thickness and the driveway and parking lot will have asphalt material thickness. The materials can be easily quantified since they are 3D elements.

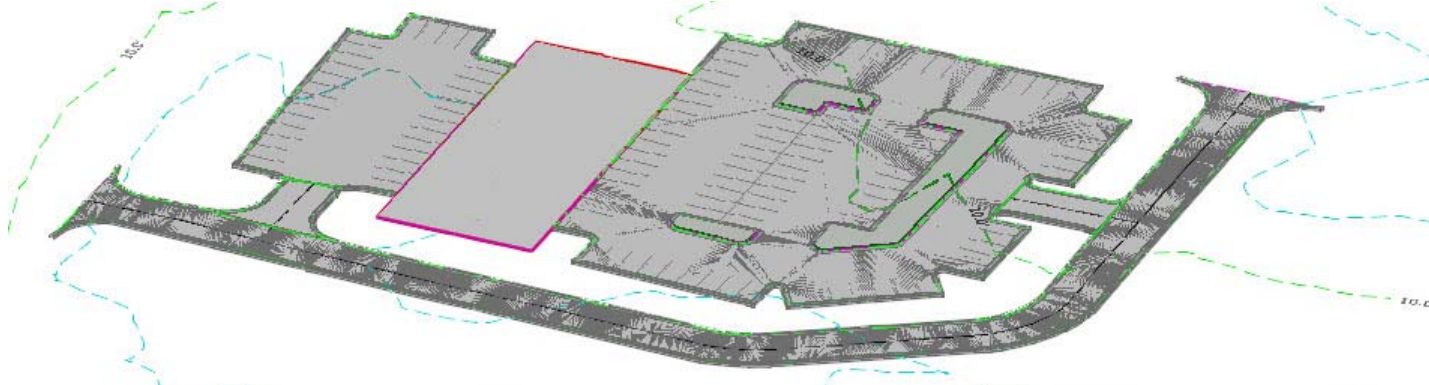

To get a better look at the material thicknesses and grading. Let's take a look at a cross section through the site.

6. To view a cross section you must first place a reference line or alignment across the site.

a. Left click in *View 1*.


b. Select **Geometry > Horizontal > Lines > Line Between Points**

c. Set the *Feature Definition* to **Alignment > Geom_Baseline**

d. Set the *Feature Name* to **Ref Line**

e. Follow the prompts and use the image below as a guide to place the reference line:

- *Enter Start:* Select a point near the mid-point of the existing western roadway.
- *Enter End:* Select a point to the east of the main drive.

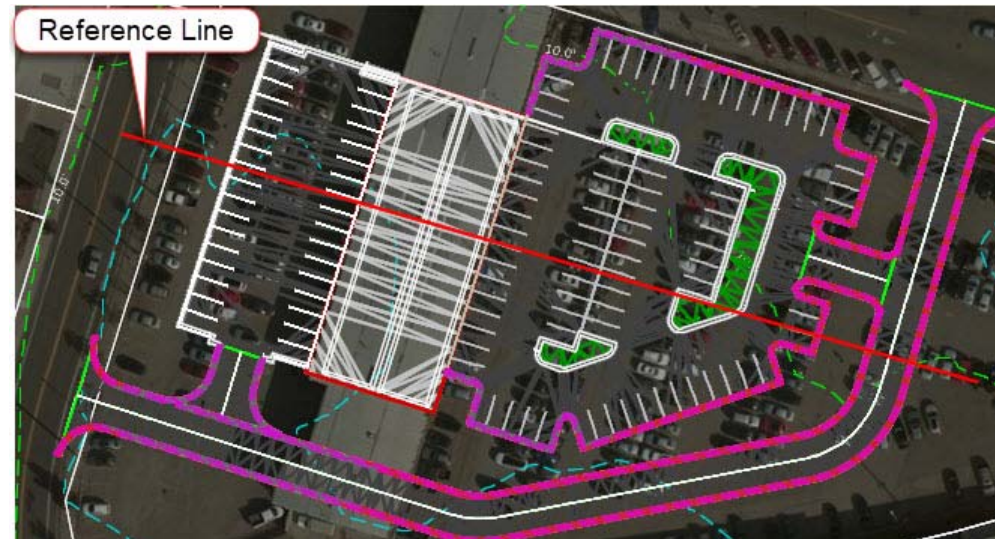

7. Create the Cross Section




a. Select **Template Modeling > Dynamic Sections**

b. Follow the heads-up prompts:

- *Locate Corridor or Alignment:* Select the reference line.
- *Left Offset:* **-200 [60]**, press **Enter** to lock the value.
- *Right Offset:* **200 [60]**, press **Enter** to lock the value.
- *Station:* **0+90 [0+030]**, press **Enter** to lock the value.
- *Interval:* **50 [10]**, press **Enter** to lock the value
- *Select or Open View:* Select **View 8** from the view control buttons at the bottom of the screen.
- Data point or Left Click in **View 8**.

The cross section will now be displayed in **View 8**.

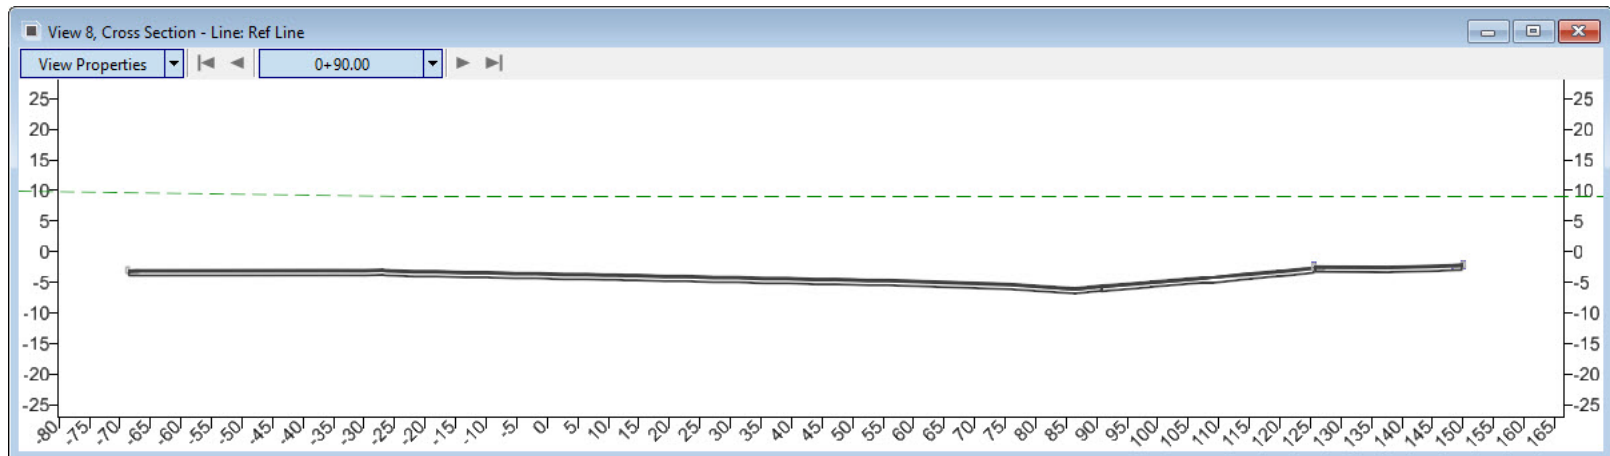

What you see in the cross section window is a “slice” through the 3D model. Any 3D element displayed in the 3D model will be shown in the cross section. Also, note the curb, parking lot and main drive all have material thickness. This material thickness comes from surface templates that are applied to the terrain models for each of these site elements.



- c. Use the navigation buttons to scroll through the cross sections.

Notice that we don't have any grading that ties to existing ground on the right side of the main drive. We will address this by adding a *Linear Template* along the south edge of the main drive.

8. Apply a Linear Template along the south edge of the main drive.



- a. Select **Template Modeling > Apply Linear Template**


- b. Following the heads up prompts (after each prompt, **Left-click** to accept values and move to next prompt):

- *Locate Element to Apply Template:* In the 2D view or 3D View, select the **CURB_BACK_TOP** feature (i.e. top back of curb).


In the 2D View, you may need to turn off the *Constructions* in the *View Attributes* to better see the **CURB_BACK_TOP** feature.

- *Feature Definition:* **Linear Template > Final**
- *Name:* **Grading**
- *Template:* **Press <ALT> and the Down Arrow** to open the template library. The *Pick Template* window will appear.
- Browse to the *Site Layout > Linear Templates > End Conditions* folder and select **Simple Tie Slope** and click **OK**
- *Start Station:* **Press <ALT> to lock to start**
- *End Station:* **Press <ALT> to lock to end**
- *Select Side - Reflect Option:* Move the cursor away from the main drive southern edge so the grading is created on the outside.
- *Exterior Corner Sweep Angle:* Do not change the setting.
- *Description:* **Grading**

Tip: If the grading displays on the wrong side, the **Properties** dialog can be used to flip the *Reflect* option.

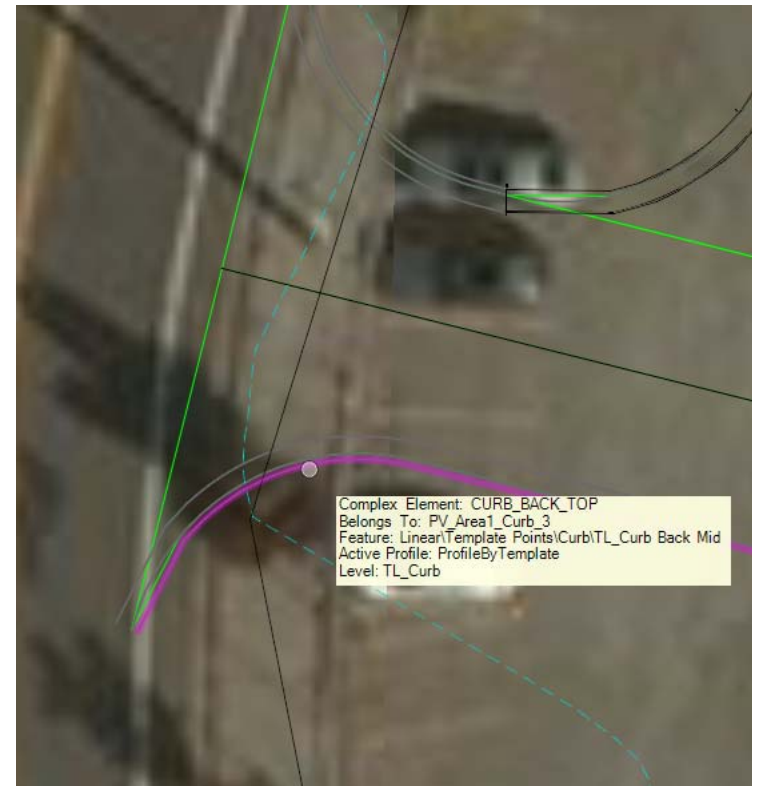

9. Review the 3D Model and Cross Sections.

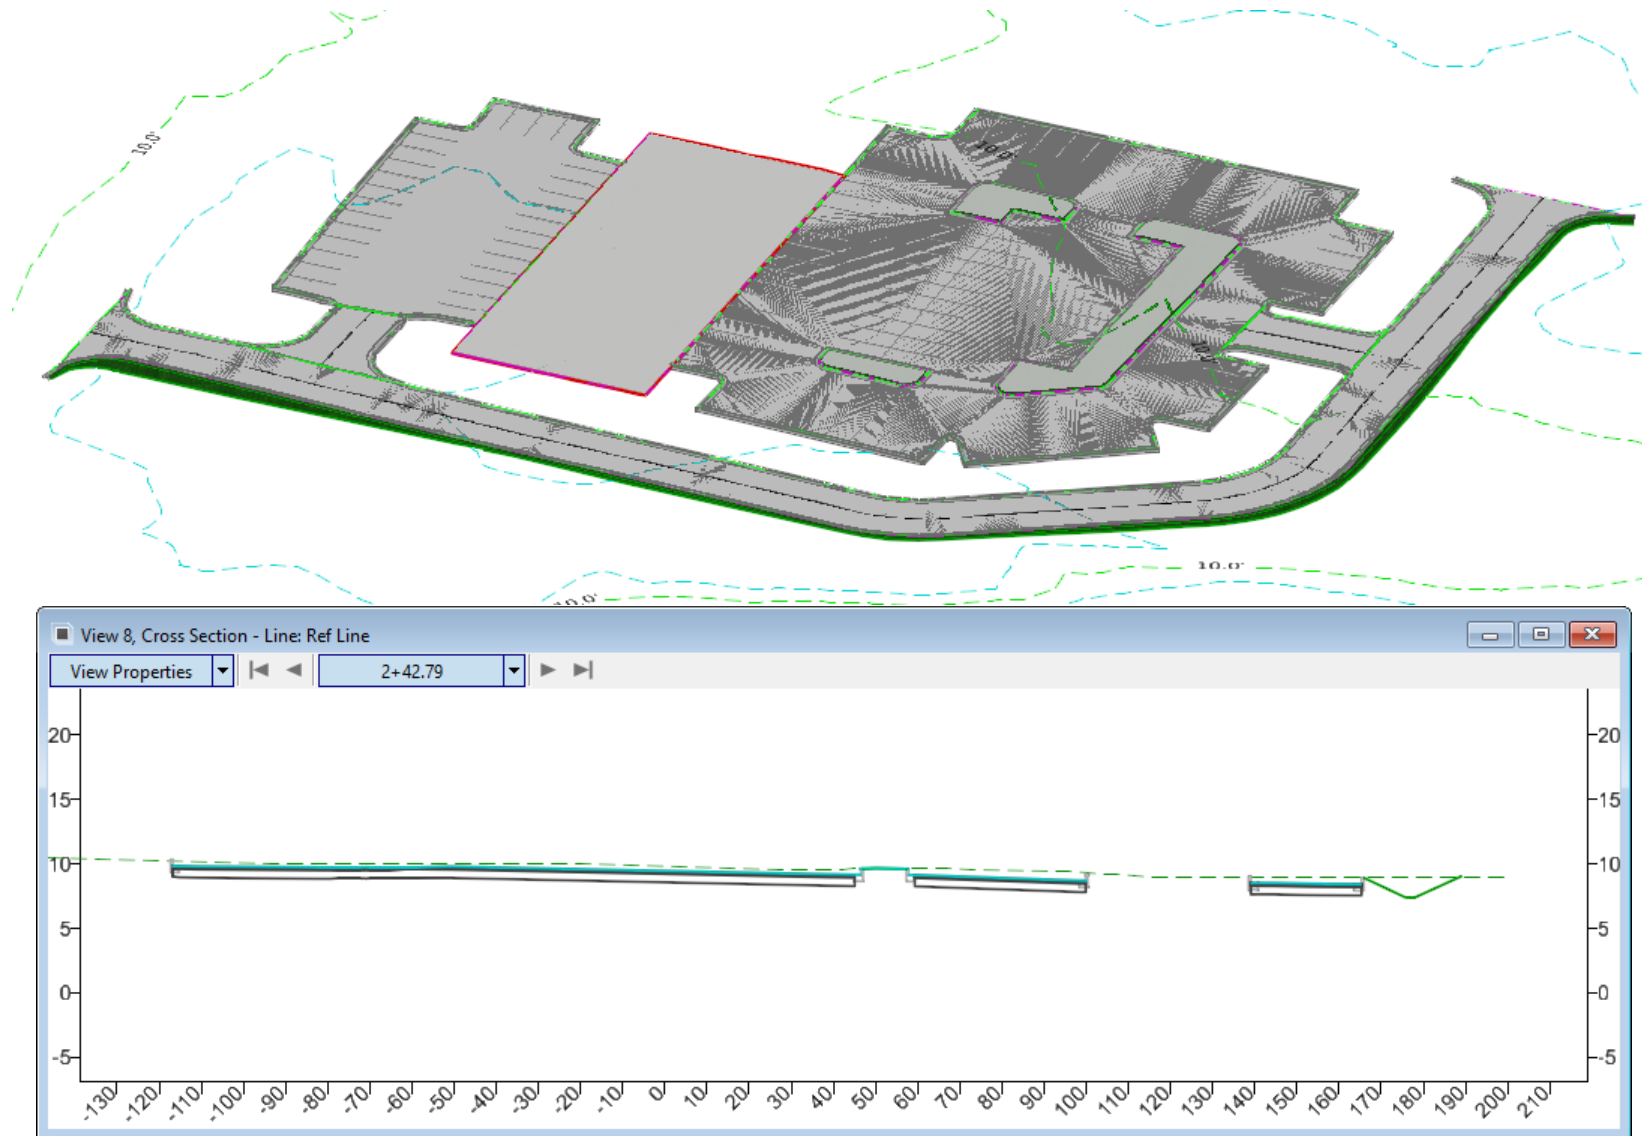

NOTE: The Linear Templates can be used to complete the grading for the rest of the project by simply applying them to the other *CURB_BACK_TOP* features.

Task - Practice What You Have Learned

Now that you have learn about the fundamental concepts of OpenSite Designer. Take some time using the horizontal layout tools to do the follow tasks in the specified order.

1. Create a New File and attach the existing terrain model and any other reference files.
2. Create a Site Project Boundary using the *Limits of Disturbance* tool.
3. Place a rectangular parking lot any size but large enough to construct a building and main driveway.
4. Place a building somewhere inside of the parking lot.
5. Place an L-shaped driveway through the parking lot.
6. Run the Grading Solver to optimize the site.

Summary

In this course, you have now learned the fundamental tools within OpenSite Designer.

You have learned how to:

- Create a Design File (.dgn)
- Review the Ribbon Interface
- Review Design File Settings
- Define a Geographical Coordinate System
- Import Existing Ground Data via LandXML file
- Attach Existing Terrain and GIS Parcels Reference Files
- Set Active Terrain Model
- 2D and 3D Model Views
- Create Site Project Boundary
- Create Building Footprint
- Create and Edit Main Drive
- Create and Edit Parking Lots
- Review Site Layout Settings
- Review Site Feature Properties with Explorer
- Create and Edit Parking Lot Drive Connectors
- Use the Grading Solver
- Optimize Project Grading
- How to Modify the Phase
- Review the 3D Model and Cross Sections
- Apply Linear Templates

